



PUEBLO CITY-COUNTY LIBRARY DISTRICT

Rawlings Library - Pueblo, CO

Loose Furniture

PROJECT FFE SUMMARY - PROPOSAL RECOMMENDATION

Bid Date: 11/26/2021

SUMMARY

METAL SHELVING
FURNITURE - BASE BID
TOTAL PROJECT FF+E
Difference

BUDGET

\$125,000
\$673,342
\$798,342

ACTUAL

\$95,230.00
\$625,770.57
\$721,000.57
\$77,341.43

FURNITURE - STAFF (Not complete)

\$172,000

TBD (in process)

LOOSE FURNISHINGS BY MANUFACTURER

RECOMMENDED - 5 DEALERS

- 1 3Branch **
- 2 Arcadia
- 3 Clarus **
- 4 ECA
- 5 Enwork
- 6 Global Industries **
- 7 Gressco / HABA **
- 8 JSI **
- 9 KI **
- 10 Kimball
- 11 Leland International **
- 12 National Office
- 13 Mediatechnologies **
- 14 Mitylite **
- 15 Peter Pepper Products **
- 16 Safco **
- 17 Science Kinetics **
- 18 Sit On It Seating
- 19 Source International **
- 20 Steelcase
- 21 Stores More Store **
- 22 Studio TK
- 23 Trinity **
- 24 TMC **
- 25 Uline **
- 26 Vitra **
- 27 V/S America

Furniture Total

** % has been applied for dealer installation cost, based on awarded manufacturers price may fluctuate.

LOWEST DEALER

Contract Furnishings	\$70,168.76
Contract Furnishings	\$59,255.35
Contract Furnishings	\$8,833.29
Workspace Innovations	\$896.20
Contract Furnishings	\$85,099.43
Projex Inc	\$2,108.50
Projex Inc	\$6,839.75
Contract Furnishings	\$26,800.93
Projex Inc	\$55,564.63
Office Spaces	\$27,900.08
Contract Furnishings	\$26,453.42
Office Spaces	\$25,081.37
Contract Furnishings	\$24,393.00
Contract Furnishings	\$70,452.73
Contract Furnishings	\$1,330.00
Contract Furnishings	\$7,335.53
Projex Inc	\$12,364.89
Pear Workplace Solutions	\$55,290.64
Contract Furnishings	\$16,335.43
Office Spaces	\$3,328.47
Projex Inc	\$1,173.46
Workspace Innovations	\$29,110.47
Contract Furnishings	\$1,794.93
Contract Furnishings	\$2,443.94
Projex Inc	\$1,044.99
Contract Furnishings	\$1,900.02
Office Spaces	\$2,470.36
Furniture Total	\$625,770.57

METAL SHELVING BY MANUFACTURER

Metal Shelving - Biblo XPO - P.O. issued

LOWEST DEALER

Libra-Tech **\$95,230.00**

FURNITURE & SHELVING TOTAL (BASE BID)

\$721,000.57

Dealer Totals (Base Bid)

Contract Furnishings **	\$402,596.76
Pear Workplace Solutions	\$55,290.64
Office Spaces	\$58,780.28
Projex Inc **	\$79,096.22
Workspace Innovations	<u>\$30,006.67</u>
	\$625,770.57

STAFF FURNITURE (Omnia Contract)

Level 0 - Private Office - P.O. issued	Pear Workplace Solutions	\$4,875.63
Level 0 - Open Office - P.O. issued	Pear Workplace Solutions	\$19,442.54
Level 0 - Task Seating - P.O. issued	Pear Workplace Solutions	\$3,048.57
Level 1 - Private Office	Pear Workplace Solutions	TBD
Level 1 - Open Office	Pear Workplace Solutions	TBD
Level 2 - Private Office	Pear Workplace Solutions	TBD
Level 2 - Open Office	Pear Workplace Solutions	TBD
Level 3 - Private Office	Pear Workplace Solutions	TBD
Level 3 - Open Office	Pear Workplace Solutions	<u>TBD</u>
TOTAL STAFF FURNITURE		\$27,366.74



December 3, 2021

Jon Walker
Executive Director
PCCLD Rawlings Library
100 E. Abriendo Ave.
Pueblo, CO 81004

RE: Rawlings Library Furniture Bid Package

Mr. Walker,

On October 22, 2021, HBM Architects invited 7 reputable furniture dealers in the Pueblo and surrounding area to provide pricing for new furniture for the Pueblo City-County Library District Rawlings Library. On November 3rd, the Library published the Furniture Project Manual publicly and extended the bidding period. Six dealers provided partial or complete proposals for the furnishings. HBM has reviewed all the proposals and have summarized the proposed next steps for purchasing.

In summary, the Loose Furnishings have come in under budget if awarding partial furniture packages to 5 of the 6 dealers that provided proposals:

Metal Shelving Actual Cost (Separate Package):	\$95,230.00
Loose Furnishings in Bid Package (Excluding Staff) Actual Cost:	<u>\$625,770.57</u>
Total Cost:	\$721,000.57
Total Furniture and Shelving Budget Estimate (Excluding Staff):	\$798,342.00
<i>*Potential dollars under budget</i>	\$77,341.43
<i>Recommended Owner Contingency (optional):</i>	<i>\$15,000</i>
<i>Total Staff Furniture Budget Estimate:</i>	<i>\$172,000</i>
<i>Total Staff Furniture Actual Cost:</i>	<i>TBD</i>

While the furniture is tracking under budget, we anticipate potential cost changes once bid packages have been awarded to the 5 dealers detailed in the summary described below. In addition, while the Staff Furniture is tracking close to the original budget estimate, there is a chance this total could be over budget as well. It is our proposal to hold an additional \$15,000 for potential overages in the Staff furniture as well as unforeseen additional freight and shipping quotes from dealers. This additional \$15,000 contingency still allows for a significant dollar amount under the original furniture budget estimate.

Attached is the following backup information:

- Furniture Proposal Summary - Summarizes which dealers are responsible for which manufacturers
- Furniture Package Proposal Tabulation Spreadsheet – tabulated all bids received including proposed substitutions
- Complete Furniture Proposals Received from all Dealers
- Complete Loose Furnishings Project Manual

The Proposal Tabulation Spreadsheet is grouped by manufacturer. We have indicated the lowest proposals highlighted in yellow. The Lowest Proposal Combination utilizing 5 Furniture Dealers has been selected for purchasing. If it is the library's desire to utilize fewer dealers or purchase furniture utilizing a different recommendation than outlined in the Proposal Tabulation Spreadsheet, the overall furniture costs will change and can be re-evaluated.

Please let me know if there is any other information you require.

Sincerely,

Brooke Breiner, NCIDQ, LEED AP ID+C

The Pueblo City-County Library District, Rawlings Library Furniture Request for Bids and Shelving Request for Bids, specifications and drawings dated October 22, 2021 are modified or changed to the extent stated herein.

All other Drawings and the Project Manual not specifically modified or changed shall remain in effect. **Acknowledgment of receipt of this Addendum must be noted on the Bid Form or the bid will not be accepted.**

Furniture Specifications

1. Specification Section 12 60 00 - Specification sheet C12
 - a. Revised quantities.
2. Specification Section 12 60 00 - Specification sheet C13
 - a. Revised quantities.
3. Specification Section 12 60 00 - Specification sheet C14
 - a. Added sheet.

Furniture Questions / Clarifications

1. Can we receive 53" trailers on site?
Answer: Yes.
2. What entrance will we be required to use for deliveries of products?
Answer: It is unknown at this time.
3. Do we need to account for OT delivery/receiving on site costs? Or will we be able to make deliveries or receive trailers during standard business hours?
Answer: Deliveries are expected during regular business hours.
4. Will the furniture installation be able to take place during standard business hours?
Answer: Yes, all installations will be during standard business hours.
5. We would like to submit the following substitutions:
 - a. L1a - L1d: Encore Seating, Melina Mid-Back Lounge Chair with Metal Swivel Base
Answer: Substitutions is acceptable. After review of submitted bids, owner reserves the right to request a sample for review prior to approval.

b. T6: HON, Motivate Flip Nesting Table

Answer: Substitutions is acceptable. After review of submitted bids, owner reserves the right to request a sample for review prior to approval.

c. T7P: HON, Motivate Flip Nesting Table, Power

Answer: Substitutions is acceptable. After review of submitted bids, owner reserves the right to request a sample for review prior to approval.

d. T8: HON, Motivate Flip Nesting Table

Answer: Substitutions is not acceptable. Design intent is to have the table height adjustable from 23" - 32".

Furniture Attachments

1. Specification Sheets: C12, C13, C14
2. Furniture Pricing Form - Unit Price List
3. Furniture Plans: A161N, A162N, A162S

End of Addendum No. 3

PROJECT MANUAL

Furniture

PUEBLO CITY-COUNTY LIBRARY DISTRICT RAWLINGS LIBRARY

100 E. ABRIENDO AVENUE
PUEBLO, COLORADO 81004

ISSUED FOR PRICING

October 22, 2021

Addendum #1, November 3, 2021

Addendum #2, November 3, 2021

Addendum #3, November 19, 2021



HBM ARCHITECTS, LLC
1382 WEST NINTH STREET, SUITE 300
CLEVELAND, OHIO 44113

T: 216.241.1100 F: 216.241.1101

INDEX TO THE PROJECT MANUAL

INDEX TO THE PROJECT MANUAL

PROPOSAL REQUIREMENTS

Instructions for Submitting Proposals

Proposal Pricing Form

SPECIFICATIONS

DIVISION 12 FURNISHINGS

Section 12 60 00 Furnishings

DRAWINGS

A161 N - Furniture Plan - Level 1 - Installation "A"

A162 N - Furniture Plan - Level 2 - Installation "A"

A162 S - Furniture Plan - Level 2 - Installation "A"

A163 N - Furniture Plan - Level 3 - Installation "B"

A163 S - Furniture Plan - Level 3 - Installation "B"

A164 N - Furniture Plan - Level 4 - Installation "C"

1.0 SUBMISSION OF PROPOSALS

A. All proposals shall be on the form provided with these instructions. The Contractor shall deliver its Proposal with all required documentation via email to Brooke Breiner at bbreiner@hbmarchitects.com and Tiffany Poje at tpoje@hbmarchitects.com or deliver one hard copy to the office of HBM Architects, 1382 West 9th Street, Suite 300, Cleveland, OH 44113 **on or before November 26, 2021 at 5:00 p.m..** For questions, contact Brooke Breiner or Tiffany Poje at (216)-241-1100 or email at bbreiner@hbmarchitects.com or tpoje@hbmarchitects.com.

B. The Owner is exempt from all sales, excise and transportation taxes. Any taxes other than these, which are applicable, are to be paid by each respective Contractor. The owner will furnish Tax Exemption Certificates to the selected contractor(s) upon request.

2.0 EXAMINATION OF DRAWINGS, SPECIFICATIONS AND SITE OF WORK

A. Before submitting a Proposal, each Contractor shall carefully examine all Drawings, read the Specifications, Addenda, and all other Contract Documents, and visit the site of the Work. Each Contractor shall fully inform himself prior to bidding as to all existing conditions and limitations under which the Work is to be performed and he shall include in his Proposal a sum to cover all costs of all items necessary to perform the Work as set forth in the Contract Documents. No allowance will be made because of lack of such examination or knowledge.

3.0 INTERPRETATION OF CONTRACT DOCUMENTS

A. If any Contractor is in doubt as to the true meaning of any part of the Contract Documents or finds discrepancies in or omissions from any part of the Contract Documents, he may submit to the Architect a written request for interpretation thereof not later than four days before proposals will be opened. The person submitting the request shall be responsible for its prompt delivery.

B. Any interpretation or correction of the Contract Documents will be made only by Addendum and will be emailed to each Contractor. The Owner will not be responsible for any other explanations or interpretations of the Contract Documents.

C. Discrepancies: In case of discrepancies between plans and specifications, the higher quantity and quality shall prevail.

4.0 STANDARDS - SUBSTITUTIONS

A. Proposals must be based on the products specified.

B. Refer to Pricing Form for Conditions of Substitution requirements.

5.0 WITHDRAWAL OF PROPOSALS

- A. No Contractor shall modify, withdraw or cancel his proposal or any part thereof within sixty (60) days after the time designated for the submittal date.

6.0 AWARD OR REJECTION OF PROPOSALS

- A. The Owner reserves the right to accept or reject any or all proposals, accept components of proposals, and to waive any informalities or irregularities.
- B. Acceptance of the proposal of any contractor shall not be binding upon the Owner until a written agreement stipulating all provisions of the work to be performed has been executed by both the Owner and the Contractor.
- C. The Owner reserves the right to selectively award contract or multiple contracts based on individual or groups of manufacturers.

7.0 EXECUTION OF AGREEMENT

- A. The Owner will issue a purchase order for all furniture.

8.0 SCHEDULE

***NOTE: Dealer shall notify designer if finish selections result in a delay of installation. Reselections may be considered in order to maintain schedule.**

- A. FURNITURE INSTALLATION: The Agreement will stipulate that the Work, together with the Alternates thereto, if any, shall begin furniture installation as shown below:
Installation 'A' - Level 1 & 2: Mid- March 2022
Installation 'B' - Level 3: August 2022
Installation 'C' - Level 4: September 2022
Based on current construction schedule. Contractor is responsible for coordinating installation dates with H.W. Houston Construction, Project Manager Mark Taravella @ Office 719.470.0029.
- B. The date of substantial completion is the date certified by the Owner's Representative when construction is sufficiently complete, in accordance with the contract documents, that the Owner may occupy or use the work for the use for which it is intended.
- C. Should the Contractor fail to substantially complete the work by the substantial completion date, he shall be deemed to be in default of this contract and the Owner shall be at liberty to immediately thereafter have the work completed and to deduct from monies owed the Contractor all costs incurred in the completion of the work.

END OF SECTION

PROPOSAL PRICING FORM

Submitted by:

_____, Date _____, 2021
(Company Name)

PROPOSAL:

Pursuant to and in compliance with the Contract Documents for the supply of Furnishings for the Pueblo City-County District Library - Rawlings Library, the undersigned Contractor, having carefully examined the Contract Documents and Addendum Number(s) _____, the site and all conditions affecting the Work, the undersigned hereby bids and agrees to furnish all labor, materials, transportation, equipment and services necessary to complete all work within the time stated and in strict accordance with the Contract Documents, for the following sum of money:

1.0 FURNISHINGS:

Contractor shall list separately the cost for each specified manufacturer. All furniture pricing may be per purchasing contract or competitively bid. Manufacturer price shall be for the quantity and products specified. Contractor's total pricing shall include all delivery, installation, profit, overhead, and incidental items required for a complete installation.

MANUFACTURER	TOTAL PRICE (DELIVERED AND INSTALLED)	LEAD TIME
3Branch		
Arcadia		
Clarus		
ECA		
Enwork		
Global Industries		
Gressco by HABA		
JSI		
KI		
Kimball		
Leland International		
National Office		
Mediatechnologies		
Mitylite		
Peter Pepper Products		
Safco		
Science Kinetics		
SitOnIt Seating		
Source International		

MANUFACTURER	TOTAL PRICE (DELIVERED AND INSTALLED)	LEAD TIME
Steelcase		
Studio TK		
Trinity		
TMC		
Uline		
Vitra		
V/S America		
TOTAL Base Bid Proposed Pricing		

2.0 UNIT PRICE LIST:

Contractor shall provide unit costs that are applicable should the owner elect to add or delete specific items.

ITEM NO.	ITEM	QTY.	UNIT PRICE	DELIVERY/INSTALL PRICE PER UNIT	TOTAL PRICE-ALL UNITS
AP1	Ball & Magnetic Run	1			
AP2	Magnetic Gears	1			
AP3a	Children Activity Panel	1 set			
AP3b	Children Activity Panel	1 set			
AP3c	Children Activity Panel	1 set			
AP3d	Children Activity Panel	1 set			
AP3e	Children Activity Panel	1			
AP3f	NOT USED				
AP3g	NOT USED				
AP3h	NOT USED				
B1	Bench	4			
B2a-b	Stool	12			
B3	Stool	6			
B4	Bench	2			
B5a	Ottoman	5			
B5b	Ottoman	10			
B6	Ottoman	8			
B7a	Ottoman	2			
B7b	Ottoman	6			
B7c	Ottoman	1			

ITEM NO.	ITEM	QTY.	UNIT PRICE	DELIVERY/INSTALL PRICE PER UNIT	TOTAL PRICE-ALL UNITS
B8	Ottoman	2			
B9	Ottoman	1			
B10	Bench	6			
C1a-d	Study Chair, Armless	130			
C2a-c	Stack Chair	108			
C3a-c	Stack Chair	204			
C4	Stool	12			
C5	DeskTask Chair	2			
C6a-c	Children's Study Chair	32			
C7	Children's Study Chair	20			
C8	Children's Study Chair	28			
C9	Stool	6			
C10	Event Chairs	350			
C11	Service Point Task Chair, Armless	10			
C12	Staff Task Chair, Arms	33			
C13	Office Guest Chair, Arms	3			
C14	Stool	4			
CC1	Chair Cart	6			
CC2	Chair Cart	12			
D1	Teacher's Desk	1			
D2P	Small Service Point Desk	1			
F1	Flat File Cabinet	1 set			
L1a	Adult Lounge Chair	8			
L1b-c	Adult Lounge Chair	16			
L1d	Adult Lounge Chair	4			
L2a	Adult Lounge Chair	4			
L2b-c	Adult Lounge Chair	6			
L2d	Adult Lounge Chair	4			
L2e	Adult Lounge Chair	2			
L2f	Adult Lounge Chair	4			

Addendum #3, November 19, 2021

Addendum #1, November 3, 2021

OCTOBER 22, 2021

PUEBLO - RAWLINGS LIBRARY

00 30 00 - 3

ITEM NO.	ITEM	QTY.	UNIT PRICE	DELIVERY/INSTALL PRICE PER UNIT	TOTAL PRICE-ALL UNITS
L3a-b	Lounge Grouping	2			
L4a-b	Lounge 3-Seater	2			
L5a	Lounge Chair	3			
L5b	Lounge Chair	4			
L5c	Lounge Chair	4			
L5d	Lounge Chair	4			
L5e	Lounge Chair	3			
L6a	Lounge Chair	2			
L6b	Lounge Chair	2			
L6c	Lounge Chair	2			
L6d	Lounge Chair	2			
L7	Poly Chair	5			
L8	Poly Chair	3			
L9a-b	Lounge Chair, 1 Arm	3			
L9c-d	Lounge Chair, 1 Arm	3			
L10	Rocking Chair	2			
L11	Child Size ounge Chair	7			
L12P	Adult Modular Lounge Grouping	1			
L13	Glider	1			
L14	Lounge Chair 1/2	3			
L15a-b	Lounge Chair	5			
LT1	Lectern	4			
MAG1a	Mag Box, Mini	2			
MAG1b	Mag Box, Standard	79			
MAG2a	Mag Box, Large	5			
MAG2b	Mag Box, Newspaper	7			
MB1	Mobile Marker Board	5			
OT1	Coffee Table	3			
OT1P	Coffee Table, Pwr	3			

ITEM NO.	ITEM	QTY.	UNIT PRICE	DELIVERY/INSTALL PRICE PER UNIT	TOTAL PRICE-ALL UNITS
OT2	Coffee Table	3			
OT2P	Coffee Table, Pwr	3			
OT3	End Table	4			
OT4P	Coffee Table, Pwr	2			
OT5	NOT USED	-			
OT6a	Coffee Table	5			
OT6b	Coffee Table	3			
OT7	End Table	7			
OT8	Coffee Table	1			
PWR1	Power Station	2			
R1	Area Rug	2			
SC1	Storage Cabinet	1			
SCR1	Acrylic Screen	1			
SH1	Shelving Unit	1			
T1	Study Table	1			
T1P	Study Table, Pwr	2			
T2	Study Table	2			
T2P	Study Table, Pwr	2			
T3	Ht. Adj. Flip/Nest Table	16			
T4	Ht. Adj. Flip/Nest Table	4			
T5	Mobile Storage Unit	3			
T6	Flip/Nest Table	71			
T7P	Flip/Nest Table, Pwr	15			
T8	Ht. Adj. Flip/Nest Table	8			
T9P	Study Table, 4 Person, Pwr	2			
T10	Study Table, 4 Person	5			
T10P	Study Table, 4 Person, Pwr	7			
T11P	Study Carrel, Pwr	6			
T12	Study Table, 2 Person	4			
T12P	Study Table, 2 Person, Pwr	5			
T13	Study Table, 4 Person	3			

ITEM NO.	ITEM	QTY.	UNIT PRICE	DELIVERY/INSTALL PRICE PER UNIT	TOTAL PRICE-ALL UNITS
T13P	Study Table, 4 Person, Pwr	2			
T14	Study Table, 2 Person	3			
T15P	Study Table, Pwr	1			
T16	Study Table	5			
T17	Study Table, 1 Person	3			
T18P	Study Table, Pwr	3			
T19	Study Table	4			
T20	Interactive Table	1			
T21P	Craft Table, Pwr	6			
T22	Round Folding Table	34			
T23	Rectangle Folding Table	94			
T24	Study Table, 2 Person	1			
T25	Study Table, 2 Person	2			
TC1	Circular Table Cart	6			
TC2	Rectangle Table Cart	10			

3.0 CONDITIONS OF SUBSTITUTION:

- A. Submit Base bids based upon the materials and equipment specified.
- B. List proposed substitutions below, together with the sum to be added to or deducted from the amount of the Base bid. The amount to be added or deducted shall include all related required changes resulting from the substitution.
- C. Furniture complete specifications and descriptions of all substitutions with the Bid. For new or infrequently used materials, equipment or processes, a history of use shall be submitted together with all documented failures or problems.
- D. After the Contract is awarded, no further substitutions will be permitted.

ITEM NO.	PROPOSED SUBSTITUTION	ADD	DEDUCT	LEAD TIME

4.0 SCHEDULE

- A. Provide a proposed schedule including milestone dates and duration times needed following contract by owner.

TASK	DURATION	DATE
Cutoff date and time for Request for Substitutions		Nov. 15, 2021, 5:00pm
Cutoff date and time for Questions		Nov. 17, 2021, 5:00pm
Proposal Submission Deadline / Public Opening to follow		Nov. 26, 2021, 5:00pm
Submit Purchase Order for Designer Review		
Order Entry		
Shop Drawing/Submittal Review		
Manufacturing Lead Times/Shipping		
Installation 'A' Target Date		Mid-March 2022
Installation 'B' Target Date		August 2022
Installation 'C' Target Date		September 2022
Owner/Designer Punchlist		
Dealer Punchlist Completion		

5.0 ACCEPTANCE:

- A. The undersigned understands that the Owner reserves the right to reject any or all proposals.
- B. The Owner reserves the right to selectively award contracts to more than one contractor based upon individual or groups of manufacturers.
- C. **The undersigned agrees that his proposal may be accepted any time prior to sixty (60) days after the closing date and will not be withdrawn prior to that date.**

DATE _____

PROPOSER / COMPANY _____

BY _____

TITLE _____

SIGNATURE _____

Official Address:

Telephone: (____)

FAX: (____)

E-mail:

Where Incorporated:

Federal I.D. Number: _____

PART 1 GENERAL

1.1 DESCRIPTION

- A. Work Included:
 - 1. Furnishings required for this work are indicated on the Drawings and are itemized in this section of the Specifications.
 - 2. All fabrics specified are part of this contract and supplied by contractor.
 - 3. Contractor must include and coordinate all furniture assembly, delivery(ies) and incidental items required for a complete installation.

1.2 QUALITY ASSURANCE:

- A. Manufacturer's and Installer's Qualifications
 - 1. The manufacturer and installer of Work of this Section shall have 5 years minimum proven experience in such Work and shall have satisfactorily completed 3 jobs of similar size and type within the last 5 years.
 - 2. All furniture must comply with CA 117.
 - 3. All fabric must comply with Prop 65.

1.3 SUBMITTALS:

- A. Submittals
 - 1. Installer's Certification of Qualifications.
 - 2. Itemized List: Itemized list of all furniture showing complete description of each item of furniture including model numbers.
 - 3. Complete Manufacturer's literature, technical data and installation instructions for each type of furniture.
 - 4. Samples of all materials for verification purposes: Submit samples of each type, color, finish, pattern and texture required, showing full range of variations.
 - 5. Submit furniture plans verifying locations of all items.
 - 6. Submit all warranties
- B. All submittals must be received by the Architect with-in 10 business days after execution of purchase order from Owner, and before any materials of this Section are delivered to the job site.

1.4 SUBSTITUTIONS

- A. Substitutions may be submitted for products specified.
 - 1. The Owner reserves the right to determine what is equal and acceptable in its sole discretion. Any proposed substitution(s) must meet or exceed the specifications set forth in this section.
 - 2. Refer to Pricing Form for Conditions of Substitution requirements.

1.5 FIELD MEASUREMENTS

- A. Assume responsibility to make field measurements to assure furniture can be moved to installation location.

1.6 PRODUCT HANDLING

- A. Protection: Use all means necessary to protect the work of this Section before, during and after installation and to protect the installed work and materials of all other trades.
- B. Replacement:
In the event of damage, immediately make all repairs and replacement necessary subject to the approval of the Architect and at no additional expense to the Owner. In the event that rejected furniture cannot be replaced before occupancy and use of the building, the rejected items shall be allowed to remain in use until replaced at no expense to the owner.

1.7 STORAGE OF FURNITURE

- A. No additional costs shall be approved for storing furnishings in order to meet the installation date set by the owner's representative.

1.8 WARRANTY

- A. Dealer shall provide a minimum one year warranty along with any extended manufacturer's warranties.
- B. Manufacturer Warranties: Include all manufacturer warranties with submittals for each manufacturer and / or item.

1.9 DELIVERIES

- A. No direct shipment or "drop shipment" of goods will be received by the Owner. All items shall be delivered and installed by contractor. Contractor/Installer can arrange to meet the truck and unload all furniture.
- B. All cartons and trash incidental to the furnishings shall be removed from the job site by the Contractor each day. No debris shall accumulate.
- C. All furnishings shall be arranged in their final position as soon as it is agreed that the areas are ready for receipt of furniture.
- D. Contractor is responsible for plugging in all powered furniture into appropriate receptacles and complete wire management installation to conceal associated cords and wires.
- E. Before installation, the Owner and Contractor shall make inspection of the route from the staging area to the final location of the furniture, itemizing all areas unfinished or damaged and still in need of Work by other Contractors.
- F. After installation of furniture a final inspection shall be made by the Owner and Contractor, following receipt in writing of notification that the installation is completed. If inspection reveals any damage due to the installation of the furniture, the damage shall be repaired by the contractor at no expense to the owner.

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP1

QTY: 1

ITEM: Ball Run

LOCATION: Children's Services 210

MANUFACTURER: Science Kinetics

MODEL NUMBER: Balls & Magnetic Ball Run Accessories

DESCRIPTION: 21 Ball Wall Parts
Magnetic pieces that can be moved around easily. Provide a variety of blue, pink, orange balls.

NOTE: Install on interactive play area, coordinate location with architect in field.



Balls: Pink, Orange,
Blue

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP2
QTY: 1
ITEM: Magnetic Gears
LOCATION: Children's Services 210
MANUFACTURER: Science Kinetics
MODEL NUMBER: Magnetic Gear Accessories

DESCRIPTION: 35 Multi-Color Circular Gears

NOTE: Install on interactive play area, coordinate location with architect in field.



Gears: Multi-Colors



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP3a

QTY: 1 set

ITEM: Activity Panels

LOCATION: Family Study 226

MANUFACTURER: HABA

MODEL NUMBER: 120215 Sensory Learning Wall Left Quarter Circle Panel
120218 Sensory Learning Wall Right Quarter Circle Panel

DESCRIPTION: 25.5"w x 2.75"d x 27.5"h
Solid Beech wood panel. Mounting hardware included.
Left Quarter Circle includes a spinning mirror, sliding games with two cars, a gas station, three bees, ball game, small cymbals and corner safety mirror.
Right Quarter Circle includes six wooden rods with a hanging block, game with airplane that slides, four piece crawling caterpillar, flower knobs, clouds with corner safety mirror.

Panels to be mounted in corner configuration. Coordinate mounting height with architect in field.

FINISH: Solid Beech Wood



Ap3a - Left Panel



Ap3a - Right Panel

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP3b

QTY: 1 set

ITEM: Activity Panels

LOCATION: Family Study 227

MANUFACTURER: HABA

MODEL NUMBER: 096304 Sensory Learning Wall Dice Activity Panel
057592 Sensory Learning Wall Standard Mirror Panel

DESCRIPTION: 16"w x 2.75"d x 17"h
Solid Beech wood panel. Mounting hardware included.
Dice panel has six colors of dice (72 total) that can be stacked between wooden dowels to make patterns and constructions. It also has a pouch that hangs below the board to collect the blocks when they fall.
Standard Mirror with wood frame and safety mirror.

Panels to be mounted side by side. Coordinate mounting height with architect in field.

FINISH: Solid Beech Wood



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP3c

QTY: 1 set

ITEM: Activity Panels

LOCATION: Family Study 228

MANUFACTURER: HABA

MODEL NUMBER: 120216 Sensory Learning Wall Curve A Panel
120221 Sensory Learning Wall Dip B Panel

DESCRIPTION: 25.5"w x 2.75"d x 27.5"h
Solid Beech wood panel. Mounting hardware included.
Curve A panel includes a magnet labyrinth, turning spiral, sliding game with four wooden animals that move up and down, eight wooden elements that slide back and forth, clutching toy, hanging prisms in four colors and clicking discs on metal rod.
Dip B panel has various types of closures: button, shoe lace, clasp, clip, velcro, drawstring, zipper, hook & loop, snap and buckle.

Panels to be mounted side by side. Coordinate mounting height with architect in field.

FINISH: Solid Beech Wood



Ap3c - Curve A Panel



Ap3c - Dip B Panel

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP3d

QTY: 1 set

ITEM: Activity Panels

LOCATION: Children's Services 210


MANUFACTURER: HABA

MODEL NUMBER: 120431 Sensory Learning Wall Four Labyrinths Panel
056893 Sensory Learning Wall Motor Skills E Panel

DESCRIPTION: Four Labyrinths: 23.75"w x 1.25"d x 23.75"h
Motor Skills E: 23.75"w x 1.25"d x 17.75"h
Solid Beech wood panel. Mounting hardware included.
Four Labyrinths panel goal is to get four same-colored stones in the horizontal, vertical or diagonal position. Stones are different colors and shapes.
Motor Skills E panel has suspended sliding balls with springs, effect turntables - one turns, the other turns with it, one magnetic dust tube-rod makes the magnetic dust dance.

Panels to be mounted staggered above and below one another. Coordinate mounting height with architect in field.

FINISH: Solid Beech Wood



Ap3d - Labyrinth Panel



Ap3d - Motor Skills E Panel

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: AP3e

QTY: 1

ITEM: Activity Panels

LOCATION: Mother's Room 210.2

MANUFACTURER: Gressco by HABA

MODEL NUMBER: Sensory Wall Wires, Beads & Gears Activity Panel
PP206

DESCRIPTION: 16"w x 6"d x 39"h
Solid Beech wood panel. Mounting hardware included.
The wire, bead and gear panel has colorful balls that can be wound around the maze and gears that when one is turned they all start moving together.

Coordinate mounting height with architect in field.

FINISH: Solid Beech Wood, Blue



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. AS1

QTY: 1

ITEM: Art Storage Unit

LOCATION: Vault 312

MANUFACTURER: Store More Store


MODEL NUMBER: Art Storage Racks for Framed Paintings
SMS-73-45640

DESCRIPTION: 12"w x 36"d x 88.25"h, Overall width: 11'-0"
Adjustable art storage racks in powder coated steel finish. Each section has two adjustable shelves. All units to be ganged together.

FINISH: Metal: Medium Gray Metallic - T23



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO.	B1		
QTY:	4		
ITEM:	Bench		
LOCATION:	Info Zone 120, Atrium 121		
MANUFACTURER:	Arcadia		
MODEL NUMBER:	Radiant Bench 7103-NS04		
DESCRIPTION:	89"w x 22"d x 17.5"H Maple bench with upholstered seat pads and powder coated metal legs with non-skid glides for concrete flooring.		
FABRIC: 	Mfg:	ArcCom	
	Pattern:	Majorca AC-62957	
	Color:	River #38	
	Width:	54"	
	Repeat:	N/A	
	Contents:	100% Silicone	
	Abr. Res.:	145,000 double rubs	
	Finish:	Inherently stain & ink resistant, anti-microbial, anti-fungal	
	Fabric Qty:	Verify Fabric Quantity with Pattern repeat	

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIP-PAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	B2a B2b
QTY:	B2a: 8 B2b: 4
ITEM:	Stool
LOCATION:	Teen Area 202, Children's Services 210
MANUFACTURER:	VS International
MODEL NUMBER:	Hokki Stool 03825-620
DESCRIPTION:	13.58"dia x 24.4"h Fixed height polypropylene stool with grey foam seat and curved thermo-plastic base.

B2a POLY: Orange 32



B2b POLY: Dark Blue 029



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: B3

QTY: 6

ITEM: Stool

LOCATION: Family Space 205A
Children's Services 210

MANUFACTURER: VS International

MODEL NUMBER: Hokki Stool
03825-380

DESCRIPTION: 13.58"dia x 14.96"h
Fixed height polypropylene stool with grey foam seat and curved thermo-plastic base.

POLY: Light Green 033



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. B4

QTY: 2

ITEM: Bench

LOCATION: Children's Services 210

MANUFACTURER: Source International

MODEL NUMBER: Lore 2-Seat Bench
2402-RO-SCR-PG

DESCRIPTION: 52"w x 29"d x 17"H
Fully upholstered bench with powder coated metal legs with non-skid
glides for carpeted flooring.

FINISH: Soft Chrome

FABRIC:



Mfg: ArcCom
Pattern: Fragment AC-63189
Color: Cobalt 10
Width: 54"
Repeat: n/a
Contents: 100% Polyurethane
Abr. Res.: 300,000 double rubs
Finish: Writeout ink resistant
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING
MATERIAL IF REQUIRED TO PREVENT
PUCKERING AND SLIPPAGE. VERIFY
WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: B5a
B5b
QTY: B5a: 5
B5b: 10
ITEM: Ottoman
LOCATION: Teen Area 202, Family Space 205A, Children's Services 210, Family Study 226
MANUFACTURER: Mediatechnologies
MODEL NUMBER: Blox Cylinder Ottoman
CBLOX-17-17
DESCRIPTION: 17"dia. x 17"H
Fully upholstered ottoman. Black coil zipper on cover which can be removed.

B5a FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Bittersweet SL-009
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

B5b FABRIC:




Mfg: Sina Pearson
Pattern: Everywhere EPU 495
Color: Zest 12
Width: 54"
Repeat: n/a
Contents: 100% EPU Polyurethane / PVC free
Abr. Res: 1,000,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.



NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	B6		
QTY:	8		
ITEM:	Ottoman		
LOCATION:	Family Space 205A, Children's Services 210, Family Study 226		
MANUFACTURER:	Mediatechnologies		
MODEL NUMBER:	Blox Cylinder Ottoman CBLOX-17-9		
DESCRIPTION:	17"dia. x 9"H Fully upholstered ottoman. Black coil zipper on cover which can be removed.		
FABRIC: 	Mfg:	ArcCom	
	Pattern:	Fragment AC-63189	
	Color:	Cobalt 10	
	Width:	54"	
	Repeat:	n/a	
	Contents:	100% Polyurethane	
	Abr. Res.:	300,000 double rubs	
	Finish:	Writeout ink resistant	
	Fabric Qty:	Verify fabric quantity with pattern repeat.	

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements


ITEM NO: B7a B7b B7c
QTY: B7a: 2
B7b: 6
B7c: 1
ITEM: Ottoman
LOCATION: Teen Area 202, Children's Services 210

MANUFACTURER: Mediatechnologies

MODEL NUMBER: Full Time Jr. Round Ottoman
FTDJ-30

DESCRIPTION: 30"dia. x 16"H
Fully upholstered ottoman with self-leveling glides. Black coil zipper on cover which can be removed.

B7a FABRIC:




Mfg: Momentum Textiles
Pattern: Silica Tech
Color: Limelight
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 270,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

B7b FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Lime SL-023
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

B7c FABRIC:



Mfg: Momentum Textiles
Pattern: Silica
Color: Oasis
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 365,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.



NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: B8

QTY: 2

ITEM: Ottoman


LOCATION: Children's Services 210

MANUFACTURER: Mediatechnologies

MODEL NUMBER: Full Time JR. Round Ottoman
FTDJ-36

DESCRIPTION: 36"dia. x 16"H
Fully upholstered ottoman with self-leveling glides. Black coil zipper on cover which can be removed.

FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Calypso SL-043
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIP-PAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: B9

QTY: 1

ITEM: Ottoman


LOCATION: Mother's Room 210.2

MANUFACTURER: Mediatechnologies

MODEL NUMBER: Full Time Jr. Round Ottoman
FTDJ-20

DESCRIPTION: 20"dia. x 16"H
Fully upholstered ottoman with self-leveling glides. Black coil zipper on cover which can be removed.

FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Calypso SL-043
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIP-PAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. B10

QTY: 6

ITEM: Bench

LOCATION: Hall 109, Rotating Exhibit 123B, Reading 217

MANUFACTURER: Arcadia

MODEL NUMBER: Nios 2-Seater Bench
2580-NS04

DESCRIPTION: 60.5"w x 20.5"d x 20"h
Bench with upholstered seat pad and powder coated metal sled base with non-skid glides for concrete flooring.

FINISH: Leg: Metallic Silver #90

FABRIC: Momentum Textiles

Silica

Dare

54"

n/a

100% Silicone

365,000 double rubs

n/a

Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING MATERIAL
IF REQUIRED TO PREVENT PUCKERING AND
SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. C1a C1c C1d

QTY: 130

C1a: 24 / C1b: Not Used

C1c: 42

C1d: 64

ITEM: Study Chair, Armless

LOCATION: Lounge 122, Reading 217, Stacks 218, Study/Collab 220.1, Quiet Reading 220.2, Tech Core 221, Genealogy Archives 311, Digitization Lab 312.2, Hispanic Resource Center 314, Atrium 321, Secure Research Rm 339

MANUFACTURER: Leland International

MODEL NUMBER: Amadeus Sled Base Stack Chair

C1a: AMS-PO-LL-ST-S

C1c: AMS-PO-SR-ST-S

C1b: AMS-PO-IN-ST-S


Reference Quote #: Q10962

DESCRIPTION: 21"w x 21.75"d x 31.75"h x 18"sh

Polypropylene shell seat and powder coated metal sled base with nylon glides for carpeting. Stacks 15 high on floor and 20 high on dolly.

FINISHES:

Leg Finish: Sterling (ST)



METAL

Shell Color:

C1a: Limelight (LL)

C1b: Not Used

C1c: Soda Red (SR)

C1d: Ink (IN)



C1a Poly



C1c Poly



C1d Poly



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. C2a / C2b / C2c

QTY: 108
C2a: 72 / C2b: 24 / C2c: 12

ITEM: Stack Chair

LOCATION: Maker Space 137, Teen Services 202, Study Room 211, Study Room 212, Study Room 213, Staff Workspace 214, Staff Workspace 304, Training/Green Room 410

MANUFACTURER: SitOnIt Seating

MODEL NUMBER: Rio Stack Chair

C2a: 1051 FT2-PS-FC15-A0-CGR-SC23-AC (Concrete Flooring)

C2b: 1051 FT2-PS-FC15-A0-G0-SC24-AC (Carpet Flooring)

C2c: 1051 FT2-PS-FC15-A0-G0-SC5-AC (Carpet Flooring)

DESCRIPTION: 21.2"w x 23.2"d x 33.4"h x 17.9"sh
Polypropylene shell with metal sled base. No glides for carpet and clear glides for concrete flooring.

FINISHES:

Leg Finish: Chrome, FC15

Shell Color: C2a - Tangerine SC23
C2b - Apple SC24
C2c - Navy SC5



C2a - Poly Color



C2b - Poly Color



C2c - Poly Color



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. C3a / C3b / C3c

QTY: 204
C3a: 68 / C3b: 69 / C3c: 67

ITEM: Stack Chair

LOCATION: Training 106, Training 107, Training 107B, Training 113, Meeting Room 121

MANUFACTURER: SitOnIt Seating
MODEL NUMBER: Rowdy Stack Chair
C3a: 92 SC-FC15-A0-N-SC15-AC4
C3b: 92 SC-FC15-A0-N-SC5-AC4
C3c: 92 SC-FC15-A0-N-SC8-AC4

DESCRIPTION: 19.5"w x 22"d x 33"h x 17.5"sh
Polypropylene shell with metal sled base and no glides for carpet flooring.

FINISHES: Leg Finish: Chrome, FC15

Shell Color: C3a - Lagoon SC15
C3b - Navy SC5
C3c - Slate SC8



C3a - Poly Color



C3b - Poly Color



C3c - Poly Color



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. C4

QTY: 12

ITEM: Stool

LOCATION: Teen Services 202

MANUFACTURER: SitOnIt Seating

MODEL NUMBER: Rio Stool, Counter Height
1051 FT1-PS-FC2-A0-GL2-SC24-AC

DESCRIPTION: 21.2"w x 23.2"d x 33.4"h x 17.9"sh
Polypropylene shell stool with metal legs. Performance multi-purpose
glides for carpet flooring.

FINISHES:

Leg Finish: Silver, FC2

Shell Color: Apple SC24



Poly Color



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C5

QTY: 2

ITEM: Desk Task Chair


LOCATION: Training 113, Circulation 421

MANUFACTURER: SitOnIt Seating

MODEL NUMBER: Rio Light Task Chair
1052FT3-PS-FC1-A0-B17-C14-SC1-UC

DESCRIPTION: 27"w x 27"d x 31.9"- 36.9"h x 16.62" - 21.75"sh
Height adjustable light task chair with poly shell and black five star base with hard surface/carpet casters (C14).

FINISHES: Leg Finish: Black, FC1



Poly Color

Shell Color: Black, SC1



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	C6a C6b C6c
QTY:	32 C6a: 11 C6b: 10 C6c: 11
ITEM:	Children's Study Chair
LOCATION:	Program Room 206
MANUFACTURER:	KI
MODEL NUMBER:	Intellect Wave Medium Chair C6a: IW415-CH-PUB-NG-NFR-CTN C6b: IW415-CH-PRK-NG-NFR-CTN C6c: IW415-CH-PZL-NG-NFR-CTN Reference Quote #: 21JC-552534/C
DESCRIPTION:	16.7"w x 17"d x 26.5"h x 15"sh All poly shell chair with 4 chrome legs, nylon glides and 15"sh.

FINISHES:	Leg Finish:	Chrome CH
	Shell Color	
	C6a:	Ultra Blue PUB
	C6b:	Rubber Ducky PRK
	C6c:	Zesty Lime PZL



C6a Poly



C6b Poly



C6c Poly



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C7

QTY: 20

ITEM: Children's Study Chair

LOCATION: Family Space 205A, Children Services 210, Family Study 227

MANUFACTURER: KI

MODEL NUMBER: Intellect Wave Large Chair
IW418-RK-PRK-NG-NFR-CTN
Reference Quote #: 21JC-552534/C

DESCRIPTION: 19.7"w x 20"d x 32"h x 18"sh
All poly shell chair with 4 powder coated metal legs, nylon glides and 18"sh.

FINISHES:



Poly/Leg Color

Leg Finish: Rubber Ducky RK

Shell Color: Rubber Ducky PRK



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C8

QTY: 28

ITEM: Children's Study Chair

LOCATION: Family Space 205A, Children Services 210, Family Study 227, Family Study 228

MANUFACTURER: KI


MODEL NUMBER: Intellect Wave Small Chair
IW413-ZL-PZL-NG-NFR-CTN
Reference Quote #: 21JC-552534/C

DESCRIPTION: 14.8"w x 15"d x 23"h x 13"sh
All poly shell chair with 4 powder coated metal legs, nylon glides and 13"sh.

FINISHES:

Leg Finish: Zesty Lime ZL

Shell Color: Zesty Lime PZL



Poly/Leg Color



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. C9

QTY: 6

ITEM: Stool

LOCATION: Children Services 210

MANUFACTURER: SitOnIt Seating

MODEL NUMBER: Rio Stool, Counter Height
1051 FT1-PS-A0-FC2-GL2-SC25-AC

DESCRIPTION: 21.2"w x 23.2"d x 33.4"h x 17.9"sh
Polypropylene shell stool with metal legs. Performance multi-purpose
glides for carpet flooring.

FINISHES:

Leg Finish: Silver, FC2

Shell Color: Lemon SC25



Poly



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C10

QTY: 350

ITEM: Event Chairs


LOCATION: Event Space 408

MANUFACTURER: Mitylite

MODEL NUMBER: DuraMax Pro Folding Chair
DURAMAXBLKPRO

DESCRIPTION: 17.8"w x 14"d x 30.5"h x 18"sh
Folding chair with stain resistant resin and padded vinyl seat. Includes safe locking device.

FINISHES:



Leg Finish: Black, EXTENDED LEAD-TIME

Shell Color: Black, EXTENDED LEAD-TIME



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C11

QTY: 10



ITEM: Service Point Task Chair, Armless

LOCATION: Atrium 121, Teen Area 202, Family Space 205A, Children's Services 210, Genealogy Archives 311, Atrium 321

MANUFACTURER: SitOnIt Seating

MODEL NUMBER: Focus 2.0 Highback Task Chair
1123 BK2 MB-Y/E3-FC1-YCC01-LA13-AR0-BT1-BC1-CH1-CS6-MESH
MC5-FG2-KD

DESCRIPTION: 26"w x 28.5"d x 38.8" - 42.6"h x 16.9" - 20.4"sh
Armless mesh high back chair with height adjustable upholstered seat, adjustable lumbar and enhanced synchro mechanism, hard floor and carpet casters (CS6) for concrete and carpet flooring. Chair has accent feature on back.

FINISHES:	Frame Color:	Black , FC1
	Nylon Base Color:	Black Nylon, BC1
	Mesh Color:	Onyx, MC5
	Accent Color:	White, LA13
FABRIC:	Mfg:	SitOnIt
	Pattern:	Pop
	Color:	Onyx
	Width:	54"
	Repeat:	n/a
	Contents:	100% post-consumer recycled polyester
	Abr. Res.:	200,000 double rubs
	Finish:	Water repellent
	Fabric Qty:	Verify fabric quantity with pattern repeat.





NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C12
QTY: 33
ITEM: Staff Task Chair, Arms
LOCATION: Staff/Museum Workroom 102, First Floor Mgr 103, Circulation 104, Circulation Mgr 104.1, Call Center 109, Security Office 110, Staff Workroom 137.1, Staff Workspace 214, Manager Office 214.1, Office 303, Staff Workspace 304, Office 305, Office 329, Office 340

MANUFACTURER: SitOnIt Seating
MODEL NUMBER: Focus 2.0 Highback Task Chair
1123 BK2 MB-Y/E3-FC1-YCC01-LA13-AR9-BT1-BC1-CH1-CS6-MC5-FG2-KD

DESCRIPTION: 28.5"w x 28.5"d x 38.8" - 42.6"h x 16.9" - 20.4"sh
Mesh high back chair with height adjustable upholstered seat, fully adjustable arms, adjustable lumbar and enhanced synchro mechanism, hard floor and carpet casters (CS6) for concrete and carpet flooring. Chair has accent feature on back.

FINISHES:	Frame Color:	Black , FC1
	Nylon Base Color:	Black Nylon, BC1
	Mesh Color:	Onyx, MC5
	Accent Color:	White, LA13
Mesh Color		
FABRIC:	Mfg:	SitOnIt
	Pattern:	Pop
	Color:	Onyx
	Width:	54"
	Repeat:	n/a
	Contents:	100% post-consumer recycled polyester
	Abr. Res.:	200,000 double rubs
	Finish:	Water repellent
	Fabric Qty:	Verify fabric quantity with pattern repeat.





NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: C13
QTY: 3
ITEM: Office Guest Chair, Arms
LOCATION: First Floor Mgr 103, ~~Circulation Mgr 104.1~~, Call Center 109, Security Office 110, ~~Staff Workroom 137.1~~, Manager Office 214.1, Office 303, Office 305, Office 329, Office 340

MANUFACTURER: SitOnIt Seating
MODEL NUMBER: Focus Guest Chair
5652-B1-A130-G5-MC5-FG2-AC3

DESCRIPTION: 24.5"w x 26"d x 34"h x 18"sh
Metal 4-leg arm chair with upholstered seat and mesh back with multi-surface glides (G5).

FINISHES:	Leg Finish:	Silver
	Mesh Color:	Onyx, MC5
Mesh Color	Mfg:	SitOnIt
FABRIC:	Pattern:	Pop
	Color:	Onyx
	Width:	54"
	Repeat:	n/a
	Contents:	100% post-consumer recycled polyester
	Abr. Res.:	200,000 double rubs
	Finish:	Water repellent
	Fabric Qty:	Verify fabric quantity with pattern repeat.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO. C14

QTY: 4

ITEM: Stool

LOCATION: Staff Museum / Workroom 102

MANUFACTURER: SitOnIt Seating


MODEL NUMBER: Rio Stool, Counter Height
1051 FT1-PS-A0-FC2-GL2-SC5-AC

DESCRIPTION: 21.2"w x 23.2"d x 33.4"h x 17.9"sh
Polypropylene shell stool with metal legs. Performance multi-purpose
glides for carpet flooring.

FINISHES:

Leg Finish: Silver, FC2

Shell Color: Navy SC5



Poly



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: CC1

QTY: 6

ITEM: Chair Cart

LOCATION: Storage 106.2, Storage 107.2, Storage 113.1, Storage 121.1

MANUFACTURER: SitOnIt Seating

MODEL NUMBER: Rowdy Stacking Chair Cart
Cart

DESCRIPTION: 31"D x 26" W x 16"H
Polypropylene shell stacking cart, stacks 40 high on the cart.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	CC2
QTY:	12
ITEM:	Chair Cart
LOCATION:	Storage 407
MANUFACTURER:	Mitylite
MODEL NUMBER:	Multi-Function Chair Cart MRCART1
DESCRIPTION:	18.75"w x 41.75"l x 44.5"h Powder coated steel folding chair cart with casters, stacks 30 high flat on the cart.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: D1
QTY: 1
ITEM: Teacher Desk
LOCATION: Training 113
MANUFACTURER: KI
MODEL NUMBER: All Terrain Mobile Instructor's Desk
ATMTD2454-74P-WSR-S5-LKM-EKM-SX-KS-SCL

DESCRIPTION: 54"w x 24"d x 29"h (Worksurface) / 18"w x 40"h (Lectern)
Mobile instructor's desk with plastic laminate worksurface, pvc edge, powdercoated metal base with locking casters and perforated steel modesty panel. Attached lectern with slanted bowed radius plastic laminate landing pad, pvc edge and metal locking cabinet, Cabinet has two adjustable shelves and black grommets.

FINISHES:



Frame:

Frame: Starlight Silver Metallic, SX

Laminate: Kensington Maple, LKM

PVC Edge: Kensington Maple, EKM



Laminate/PVC:




NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	D2P
QTY:	1
ITEM:	Small Service Point Desk
LOCATION:	Circulation 421
MANUFACTURER:	Peter Pepper Products
MODEL NUMBER:	Axcess Mobile Desk AX35
DESCRIPTION:	39"W x 15.5"D x 29"H Mobile desk with pedestal base, steel perforated sides and (1) sliding door on each side, with powder coat finish. 3D laminate work surface that rotates to any desired position on steel leg with lockable caster. Electric Module, and pedestal door lock.

FINISHES:	Leg:	Aluminum Metallic 1215
	Top:	MA3 Natural Maple
	Door Finish:	Aluminum Metallic 1215



Laminate Top



Leg/Door Finish

Power:	Electric Module (2) 120v receptacles, (2) USB charging ports with 10' cord.
--------	---



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	F1
QTY:	1 set
ITEM:	Flat File Cabinet
LOCATION:	Vault 312
MANUFACTURER:	Safco Products Co.
MODEL NUMBER:	Flat File, 5 Drawer with Closed Base, Total 20 Drawers 5-Drawer Unit: (4) 4998GRR Closed Base Unit: (1) 4999GRR 6"H Lock: (4) 4981 lock kit
DESCRIPTION:	53.5"w x 41.5"d x 16.5"h x 72"h (overall) Four steel 5-drawer flat file drawer unit with lock kit. Units stacked on one 6"H closed base. For 36" x 48" media.
FINISHES:	Gray, GRR



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L1a L1b L1c
QTY:	L1a: 8 L1b: 8 L1c: 8
ITEM:	Adult Lounge Chair
LOCATION:	Lounge 122, Reading 217, Non-Fiction 220, Tech Core 221, Atrium 321
MANUFACTURER:	Kimball
MODEL NUMBER:	Bloom Lounge Chair K781XA-COM-500-C13
DESCRIPTION:	30"w x 30"d x 33"h x 17"sh Fully upholstered lounge chair with 4-star static x-base in light brushed aluminum finish (500) and clear glides (C13) and auto-return seat.
FINISH:	Metal: Light Brushed Aluminum, 500
L1a: FABRIC:	Mfg: Momentum Textiles Pattern: Silica Tech Color: Limelight Width: 54" Repeat: n/a Contents: 100% Silicone Abr. Res: 270,000 double rubs Finish: n/a Fabric Qty: Verify fabric quantity with pattern repeat.
L1b & L1c: FABRIC:	Mfg: Momentum Textiles Pattern: Silica Color: Firelight Width: 54" Repeat: n/a Contents: 100% Silicone Abr. Res: 365,000 double rubs Finish: n/a Fabric Qty: Verify fabric quantity with pattern repeat.
	Mfg: Momentum Textiles Pattern: Silica Color: Go
	NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L1d
QTY: 4

ITEM: Adult Lounge Chair
LOCATION: Stacks 218

MANUFACTURER: Kimball
MODEL NUMBER: Bloom Lounge Chair
K781XA-COM-500-C13

DESCRIPTION: 30"w x 30"d x 33"h x 17"sh
Fully upholstered lounge chair with 4-star static x-base in light brushed aluminum finish (500) and clear glides (C13) and auto-return seat.

FINISH: Metal: Light Brushed Aluminum, 500



L1d: FABRIC:






L1d

Mfg: Momentum Textiles
Pattern: Foray
Color: Seaport
Width: 54"
Repeat: n/a
Contents: 100% Polyurethane
Abr. Res: 714,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L2a L2b L2c		
QTY:	L2a: 4		
	L2b: 4		
	L2c: 2		
ITEM:	Adult Lounge Chair		
LOCATION:	Stacks 218, Hispanic Resource Center 314		
MANUFACTURER:	JSI		
MODEL NUMBER:	Arwyn Lounge Chair AW6011-CO-COM-PBC-PSC-MFASL		
DESCRIPTION:	34"w x 29.5"d x 29.25"h x 16.25"sh Fully upholstered lounge chair with cleanout and metal legs in powder coated finish.		
FINISH:	Metal:	Arctic Silver, ASL	
L2a: FABRIC:	Mfg:	Momentum Textiles	
	Pattern:	Silica Tech	
 L2a	Color:	Limelight	
	Width:	54"	
	Repeat:	n/a	
	Contents:	100% Silicone	
	Abr. Res:	270,000 double rubs	
	Finish:	n/a	
	Fabric Qty:	Verify fabric quantity with pattern repeat.	
L2b & L2c: FABRIC:	Mfg:	Momentum Textiles	
	Pattern:	Silica	
	Color:	Go	
	Width:	54"	
	Repeat:	n/a	
	Contents:	100% Silicone	
	Abr. Res:	365,000 double rubs	
 L2b	Finish:	n/a	
	Fabric Qty:	Verify fabric quantity with pattern repeat.	
	Mfg:	Momentum Textiles	
 L2c	Pattern:	Silica	
	Color:	Dare	



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L2d L2e L2f
QTY: L2d: 4
L2e: 2
L2f: 4
ITEM: Adult Lounge Chair
LOCATION: Lounge 122, Genealogy Archives 311, Hispanic Resource Center 314
MANUFACTURER: JSI
MODEL NUMBER: Arwyn Lounge
AW6011-CO-COM-PBC-PSC-MFASL

DESCRIPTION: 34"w x 29.5"d x 29.25"h x 16.25"sh
Fully upholstered lounge chair with cleanout and metal legs in powder coated finish.

FINISH: Metal: Arctic Silver, ASL



L2d: FABRIC:



L2d

Mfg: Momentum Textiles
Pattern: Foray
Color: Seaport
Width: 54"
Repeat: n/a
Contents: 100% Polyurethane
Abr. Res: 714,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

L2e: FABRIC:



L2e

Mfg: Momentum Textiles
Pattern: Silica
Color: Firelight
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 365,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

L2f: FABRIC:



L2f

Mfg: ArcCom Fabrics
Pattern: Majorca AC-62957
Color: River #38
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 145,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L3a L3b
QTY:	L3a: 1 L3b: 1
ITEM:	Lounge Grouping
LOCATION:	Lounge 122
MANUFACTURER:	Source International
MODEL NUMBER:	Lore 2 Seat Chaise with Single Seat Bench L3a: Left Arm: 2602-LA-RO-SCR-PG + 2401-RO-SCR-PG + GD L3b: Right Arm: 2601-LA-RO-SCR-PG + 2401-RO-SCR-PG + GD
DESCRIPTION:	55.5"w x 29"d x 29"h x 17"sh (Chaise) 26"w x 29"d x 29"h x 17"sh (Bench) Fully upholstered two seat chaise with low arm and single seat bench ganged together with powder coated round metal legs with adjustable plastic glides with chrome trim.
FINISH:	Soft Chrome
FABRIC:	Mfg: Momentum Textiles Pattern: Silica Tech Color: Limelight Width: 54" Repeat: n/a Contents: 100% Silicone Abr. Res.: 270,000 double rubs Finish: n/a Fabric Qty: Verify fabric quantity with pattern repeat.




NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



Shown as 3 seater and no bench

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L4a L4b	
QTY:	L4a: 1 L4b: 1	
ITEM:	Lounge 3 Seater	
LOCATION:	Lounge 122	
MANUFACTURER:	Source International	
MODEL NUMBER:	Lore 3 Seat Chaise L4a: Left Arm: 2702-LA-RO-SCR-PG L4b: Right Arm: 2701-LA-RO-SCR-PG	
DESCRIPTION:	55.5"w x 29"d x 29"h x 17"sh (Chaise) Fully upholstered three seat chaise with low arm with powder coated round metal legs with adjustable plastic glides with chrome trim.	
FINISH:	Soft Chrome	
FABRIC:	Mfg:	Momentum Textiles
	Pattern:	Silica Tech
	Color:	Limelight
	Width:	54"
	Repeat:	n/a
	Contents:	100% Silicone
	Abr. Res.:	270,000 double rubs
	Finish:	n/a
	Fabric Qty:	Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L5a L5b

QTY: L5a: 3
L5b: 4

ITEM: Lounge Chair

LOCATION: Teen Area 202

MANUFACTURER: Arcadia

MODEL NUMBER: Nios Sled Base Lounge Chair
2551-90

DESCRIPTION: 33"w x 31.5"d x 32"h x 16.75"sh
Fully upholstered lounge chair with powder coated metal sled base.
Chrome accent feature between seat and back.

FINISH: Metal: Metallic Silver, #90



L5a: FABRIC:



Mfg: Momentum Textiles
Pattern: Silica Tech
Color: Limelight
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 270,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

L5b: FABRIC:



Mfg: Momentum Textiles
Pattern: Silica
Color: Oasis
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 365,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING
MATERIAL IF REQUIRED TO PREVENT
PUCKERING AND SLIPPAGE. VERIFY
WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L5c L5d

QTY: L5c: 4
L5d: 4

ITEM: Lounge Chair

LOCATION: Hall 109, Teen Area 202

MANUFACTURER: Arcadia

MODEL NUMBER: Nios Sled Base Lounge Chair
2551-90

DESCRIPTION: 33"w x 31.5"d x 32"h x 16.75"sh
Fully upholstered lounge chair with powder coated metal sled base.
Chrome accent feature between seat and back.

FINISH: Metal: Metallic Silver, #90



L5c: FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Bittersweet SL-009
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

L5d: FABRIC:



Mfg: Momentum Textiles
Pattern: Silica
Color: Firelight
Width: 54"
Repeat: n/a
Contents: 100% Silicone
Abr. Res: 365,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING
MATERIAL IF REQUIRED TO PREVENT
PUCKERING AND SLIPPAGE. VERIFY
WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L5e
QTY: 3

ITEM: Lounge Chair
LOCATION: Event Space 408

MANUFACTURER: Arcadia
MODEL NUMBER: Nios Sled Base Lounge Chair
2551-90

DESCRIPTION: 33"w x 31.5"d x 32"h x 16.75"sh
Fully upholstered lounge chair with powder coated metal sled base.
Chrome accent feature between seat and back.

FINISH: Metal: Metallic Silver, #90




FABRIC:

Mfg: Momentum Textiles
Pattern: Foray
Color: Mineral
Width: 54"
Repeat: n/a
Contents: 100% Polyurethane
Abr. Res: 714,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING
MATERIAL IF REQUIRED TO PREVENT
PUCKERING AND SLIPPAGE. VERIFY
WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L6a L6b		
QTY:	L6a: 2 L6b: 2		
ITEM:	Lounge Chair		
LOCATION:	Quiet Reading 220.2		
MANUFACTURER:	Arcadia		
MODEL NUMBER:	Nios High Back Lounge Chair with Wood Leg Base 2564-11		
DESCRIPTION:	33"w x 31.5"d x 41"h x 17"sh Fully upholstered lounge chair with four beech legs. Chrome accent feature between seat and back.		
FINISH:	Metal:	Natural Beech, #12	
 L6a: FABRIC:	Mfg:	ArcCom Fabrics	
	Pattern:	Majorca AC-62957	
	Color:	River #38	
	Width:	54"	
	Repeat:	n/a	
	Contents:	100% Silicone	
	Abr. Res:	145,000 double rubs	
	Finish:	n/a	
 L6b: FABRIC:	Fabric Qty:	Verify fabric quantity with pattern repeat.	
	Mfg:	Momentum Textiles	
	Pattern:	Foray	
	Color:	Seaport	
	Width:	54"	
	Repeat:	n/a	
	Contents:	100% Polyurethane	
	Abr. Res:	714,000 double rubs	
	Finish:	n/a	
	Fabric Qty:	Verify fabric quantity with pattern repeat.	

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L6c L6d	
QTY:	L6c: 2 L6d: 2	
ITEM:	Lounge Chair	
LOCATION:	Quiet Reading 220.2	
MANUFACTURER:	Arcadia	
MODEL NUMBER:	Nios High Back Lounge Chair with Wood Leg Base 2564-11	
DESCRIPTION:	33"w x 31.5"d x 41"h x 17"sh Fully upholstered lounge chair with four beech legs. Chrome accent feature between seat and back.	
FINISH:	Metal:	Natural Beech, #12
L6c: FABRIC:	Mfg:	Momentum Textiles
	Pattern:	Silica
	Color:	Go
	Width:	54"
	Repeat:	n/a
	Contents:	100% Silicone
	Abr. Res:	365,000 double rubs
	Finish:	n/a
L6d: FABRIC:	Fabric Qty:	Verify fabric quantity with pattern repeat.
	Mfg:	Momentum Textiles
	Pattern:	Silica Tech
	Color:	Limelight
	Width:	54"
	Repeat:	n/a
	Contents:	100% Silicone
	Abr. Res:	270,000 double rubs
	Finish:	n/a
	Fabric Qty:	Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L7

QTY: 5

ITEM: Poly Chair

LOCATION: Teen Area 202, Children's Services 210

MANUFACTURER: Vitra

MODEL NUMBER: Panton Chair

DESCRIPTION: 19.75"w x 24"d x 34"h x 17.5"sh
Cantilevered polypropylene lounge chair with matt finish.

POLY FINISH: Glacier Blue, 37



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L8

QTY: 3

ITEM: Poly Chair

LOCATION: Children's Services 210

MANUFACTURER: Vitra

MODEL NUMBER: Panton Jr. Chair

DESCRIPTION: 14.75"w x 17.5"d x 24.75"h x 13.75"sh
Cantilevered polypropylene lounge chair with matt finish.

POLY FINISH: Golden Yellow, 96



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L9a L9b L9c L9d		
QTY:	L9a: 1		
	L9b: 2		
	L9c: 2		
-----	L9d: 1		
ITEM:	Lounge Chair, One Arm		
	Family Space 205A, Children's Services 210		
MANUFACTURER:	National Office		
MODEL NUMBER:	Fringe Club Chair (No Tablet Arms, via SPECIAL)		
	L9a & L9c: (Left Arm): N93CSLL-COM-501-STD (NST01393155974 & NAR.1393155985)		
	L9b & L9d: (Right Arm): N93CSRR-COM-501-STD (NST01393155975 & NAR.1393155986)		
DESCRIPTION:	28.6255"w x 28"d x 34.25"h x 18.5"sh		
	Single arm lounge chair fully upholstered with five-prong powder coated metal base with nylon glides and 360 degree swivel with auto-return.		
FINISH:	Platinum Metallic, 501		
L9a & b: FABRIC:	Mfg:	Mayer Fabrics	
	Pattern:	Slick	
	Color:	Calypso SL-043	
	Width:	54"	
	Repeat:	N/A	
	Contents:	100% Vinyl with Urethane Topcoat	
	Abr. Res.:	1,000,000 double rubs	
	Finish:	Silverguard, Permablok, Permaguard	
	Fabric Qty:	Verify Fabric Quantity with Pattern repeat	
L9c & d: FABRIC:	Mfg:	ArcCom	
	Pattern:	Fragment AC-63189	
	Color:	Cobalt 10	
	Width:	54"	
	Repeat:	n/a	
	Contents:	100% Polyurethane	
	Abr. Res.:	300,000 double rubs	
	Finish:	Writeout ink resistant	
	Fabric Qty:	Verify fabric quantity with pattern repeat.	

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	L10
QTY:	2
ITEM:	Rocking Chair
LOCATION:	Family Space 205A
MANUFACTURER:	National Office
MODEL NUMBER:	Delgado Rocking Chair N53GURKW-COM-NM
DESCRIPTION:	27.75"w x 26"d x 32.5"h x 17.5"sh Fully upholstered rocking chair with wood and polished tubular steel rocker base.
METAL FINISH:	Polished Steel
WOOD FINISH:	Natural Maple, NM
FABRIC:	Mfg: Mayer Fabrics Pattern: Slick Color: Calypso SL-043 Width: 54" Repeat: N/A Contents: 100% Vinyl with Urethane Topcoat Abr. Res.: 1,000,000 double rubs Finish: Silverguard, Permablok, Permaguard Fabric Qty: Verify Fabric Quantity with Pattern repeat



NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L11

QTY: 7

ITEM: Child Size Lounge Chair

LOCATION: Family Space 205A, Children's Services 210, Mother's Room 210.2


MANUFACTURER: Arcadia

MODEL NUMBER: Leaflette Lounge Chair - Child Size
3770-NS02B

DESCRIPTION: 28.25"w x 21.5"d x 24.75"h x 15"sh
Child size lounge chair fully upholstered with metal legs.

METAL FINISH: Metallic Silver, #90

FABRIC:



Mfg: Momentum Textiles
Pattern: Everywhere EPU 495
Color: Zest 12
Width: 54"
Repeat: n/a
Contents: 100% EPU Polyurethane / PVC free
Abr. Res.: 1,000,000 double rubs
Finish: n/a
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING
MATERIAL IF REQUIRED TO PREVENT
PUCKERING AND SLIPPAGE. VERIFY
WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: L12P
QTY: 1
ITEM: Adult Modular Lounge Grouping
LOCATION: Family Space 205A
MANUFACTURER: National Office
MODEL NUMBER: Fringe Midback Lounge Grouping

(2) 2-Seat: N93M2M-COM 'A'-501-STD
(1) Table: N93TEN2727L-CUT-G23-NM-501-STD
(2) Inside Curve: N93MINR9-COM 'A'-501-STD
(1) 3-Seat Bench: N93B3S71-COM 'B'-501-STD
(1) 1-Seat: N93M1M-COM 'A'-501-STD
(1) Cove Power: NACG23ELS (1) Cable Grippers Set of 5
(6) Ganging Brackets: N93GB2
DESCRIPTION: Dimensions Vary

Fully upholstered modular lounge grouping with metal legs. Power/Dual USB module on surface of table with 9' powercord with 3-prong plug and under surface wire manager below. All pieces to be ganged together.

METAL FINISH: Polished Steel
LAMINATE FINISH: Natural, NM

'A' COM: FABRIC:



Mfg: ArcCom
Pattern: Fragment AC-63189
Color: Cobalt 10
Width: 54"
Repeat: n/a
Contents: 100% Polyurethane
Abr. Res.: 300,000 double rubs
Finish: Writeout ink resistant
Fabric Qty: Verify fabric quantity with pattern repeat.

'B' COM: FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Lime SL-023
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

PROVIDE
SHOP
DRAWINGS.

NOTE: PROVIDE MUSLIN BACKING MATERIAL IF REQUIRED TO PREVENT PUCKERING AND SLIPPAGE. VERIFY WITH MANUFACTURER.



Power



Wire Manager



2-Seat

Table

Inside Curve

3-Seat Bench

1-Seat

PUEBLO - RAWLINGS LIBRARY

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L13

QTY: 1

ITEM: Glider

LOCATION: Mother's Room 210.2

MANUFACTURER: Trinity

MODEL NUMBER: Facelift Evolve Lounge Glider
1854-G

DESCRIPTION: 27"w x 32"d x 35"h x 18"sh
Fully upholstered glider lounge chair with circular metal base. Covers are removable.

FABRIC:



Mfg: ArcCom
Pattern: Fragment AC-63189
Color: Cobalt 10
Width: 54"
Repeat: n/a
Contents: 100% Polyurethane
Abr. Res.: 300,000 double rubs
Finish: Writeout ink resistant
Fabric Qty: Verify fabric quantity with pattern repeat.

NOTE: PROVIDE MUSLIN BACKING
MATERIAL IF REQUIRED TO PREVENT
PUCKERING AND SLIPPAGE. VERIFY
WITH MANUFACTURER.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L14

QTY: 3

ITEM: Lounge Chair 1/2

LOCATION: Children's Services 220, Family Study 228

MANUFACTURER: JSI

MODEL NUMBER: Hedron 31" Single Seat
HN5311U

DESCRIPTION: 38"w x 26.5"d x 31"h x 18.5"sh
Fully upholstered lounge chair with 31" wide seat and metal legs.

FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Calypso SL-043
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: L15a
L15b
QTY: L15a: 3
L15b: 2
ITEM: Lounge Chair
LOCATION: Children's Services 210, Family Study 226, Family Study 228
MANUFACTURER: JSI
MODEL NUMBER: Hedron Single Seat
HN5301U
DESCRIPTION: 28"w x 26.5"d x 31"h x 18.5"sh
Fully upholstered lounge chair with metal legs.

L15a: FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Lime SL-023
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat

L15b: FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Calypso SL-043
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: LT1

QTY: 4

ITEM: Lectern

LOCATION: Training Room 106, Training Room 107, Training Room 107B, Meeting Room 122

MANUFACTURER: Enwork

MODEL NUMBER: Zori Height Adjustable Lectern
CYL1PC-SBA


DESCRIPTION: 26"D x 28"W x 30.5"-48.5"H
Base cabinet is 24"D x 20"W x 24"H
Pneumatic height adjustable lectern on casters, locking laminate cabinet.

FINISHES:

Caster Color: Black (B)

Laminate: Wilsonart Kensington Maple (A) 10776-60

Paint Color: Silver (S)



Laminate



NOTE:
Lectern Cabinet
to be locking

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	MAG1a MAG1b
QTY:	MAG1a: 2 MAG1b: 79
ITEM:	MAG1a: Magazine Box, Mini MAG1b: Magazine Box, Standard
LOCATION:	Lounge 122
MANUFACTURER:	3Branch
MODEL NUMBER:	MAG1a: Mag Box, Mini Size #3525 MAG1b: Mag Box, Standard Size #3521
DESCRIPTION:	MAG1a: 6.5"w x 7.5"d x 5.75"h MAG1b: 9.375"w x 7.75"d x 8"h Clear plastic magazine box for magazines in standard and mini sizes.



MAG1a



MAG1b

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	MAG2a MAG2b
QTY:	MAG2a: 5 MAG2b: 7
ITEM:	MAG2a: Magazine Box, Large MAG2b: Magazine Box, Newspaper Box
LOCATION:	Lounge 122
MANUFACTURER:	3Branch
MODEL NUMBER:	MAG2a: Mag Box, Large Size #3522 MAG2b: Mag Box, Newspaper Size #3524
DESCRIPTION:	MAG2a: 11.625"w x 7.75"d x 10.125"h MAG2b: 13.625"w x 8"d x 9.25"h Clear plastic magazine box for magazines and newspapers in large and newspaper sizes.



MAG2a



MAG2b

NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: MB1

QTY: 5

ITEM: Mobile Marker Board



LOCATION: Maker Space 137, Teen Area 202, Children's Services 210

MANUFACTURER: Clarus

MODEL NUMBER: Go! Mobile
Four Wheel, Medium Glass Markerboard with Box Tray Accessory

DESCRIPTION: 40"w x 73"H
5/32" Clarus tempered safety writing glass, non-staining writing surface with magnetic finish. Powder coated steel frame and casters. Include the following per markerboard: 2 Magnetic Box Tray, 12"w x 2.25"d x 1.75"h, Big Orange finish / 2 sets Clarus Markers / 2 sets Square Magnets, White finish / 2 Magnetic Erasers.

FINISHES:

	Frame:	Satin Silver
	Glass:	White
	Casters:	Grey
	Box Tray:	Big Orange
	Magnets:	White

Frame:

Box Tray:



Box Tray



Magnets



Mag. Eraser



Markers



NOTE: All images are for reference only. Refer to product specifications for actual requirements


P: Denotes power in table

ITEM NO:	OT1 OT1P
QTY:	OT1: 3 OT1P: 3
ITEM:	Coffee Table
LOCATION:	Lounge 122, Reading 217, Stacks 218, Non-Fiction 220, Tech Core 221, Hispanic Resource Center 314, Atrium 321
MANUFACTURER:	Studio TK
MODEL NUMBER:	Bevy Square CoffeeTable OT1: STETQC16N-B-FL-10776-60-P-F-60 (SPECIAL) OT1P: STETQC16D-B-FL-10776-60-P-F-60-STYDB-P-7Y (SPECIAL)
DESCRIPTION:	36"w x 36"d x 16"h Square coffee table with laminate top and metal 4-prong base with levelers. OT1P Power: Single Round Power Bump with 1 receptacle and 2 USB and cable manager on table leg.

FINISHES:



Laminate Top



Base



Power Unit

Base:	Platinum 60
Top:	Laminate: Wilsonart, Kensington Maple 10776-60 (SPECIAL)
Edge Style:	To match top
Power:	Single Round Power Bump with 1 Simplex, 2 USB (STYD), Finish: 7Y(STORM WHITE)



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	OT2 OT2P
QTY:	OT2: 3 OT2P: 3
ITEM:	Coffee Table
LOCATION:	Teen Area 202, Stacks 218
MANUFACTURER:	Studio TK
MODEL NUMBER:	Bevy Round Coffee Table OT2: STETRC16N-B-FL-10776-60-P-F-60 (SPECIAL) OT2P: STETRC16D-B-FL-10776-60-P-F-60-STYDB-P-7Y (SPECIAL)
DESCRIPTION:	36"dia x 16"h Round coffee table with laminate top and metal 4-prong base with levelers. OT2P Power: Single Round Power Bump with 1 receptacle and 2 USB and cable manager on table leg.
FINISHES:	Base: Platinum 60 Top: Laminate: Wilsonart, Kensington Maple 10776-60 (SPECIAL) Edge Style: To match top Power: Single Round Power Bump with 1 Simplex, 2 USB (STYD), Finish: 7Y(STORM WHITE)



Laminate Top



Base



Power Unit



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: OT3

QTY: 4

ITEM: End Table

LOCATION: Lounge 122, Stacks 218

MANUFACTURER: Studio TK

MODEL NUMBER: Bevy Square End Table
STETSA20N-B-FL-10776-60-P-F-60 (SPECIAL)

DESCRIPTION: 24"w x 24"d x 20"h
Square end table with laminate top and metal 4-prong base with levelers.


FINISHES: Base: Platinum 60



Laminate Top

Top: Laminate: Wilsonart, Kensington Maple 10776-60 (SPECIAL)

Edge Style: To match top



Base



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: OT4P

QTY: 2

ITEM: Coffee Table

LOCATION: Stacks 218

MANUFACTURER: Studio TK

MODEL NUMBER: Bevy Square CoffeeTable
STETSB16D-B-FL-10776-60-P-F-60-STYDB-P-7Y (SPECIAL)

DESCRIPTION: 30"w x 30"d x 16"h
Square coffee table with laminate top and metal 4-prong base with levelers. Power: Single Round Power Bump with 1 receptacle and 2 USB and cable manager on table leg.

FINISHES: Base: Platinum 60



Laminate Top

Top: Laminate: Wilsonart, Kensington Maple 10776-60 (SPECIAL)

Edge Style: To match top



Base

Power: Single Round Power Bump with 1 Simplex, 2 USB (STYD),
Finish: 7Y(STORM WHITE)



Power Unit



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: OT5 NOT USED

QTY:

ITEM:

LOCATION:

MANUFACTURER:

MODEL NUMBER:

DESCRIPTION:

FINISHES: Base:

Top:

Edge Style:

Power:

NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: OT6a OT6b

QTY: OT6a: 5
OT6b: 3

ITEM: Coffee Table

LOCATION: Hall 109, Teen Area 202, Family Space 205A, Children's Services 210,
Quiet Reading 220.2

MANUFACTURER: Arcadia

MODEL NUMBER: Betwixt Coffee Table
OT6a: 2300-3616
OT6b: 2300-2916

DESCRIPTION: OT6a: 36"dia x 16"h
OT6b: 29"dia x 16"h
Round coffee table with laminate top with wood edge and metal rod base
with felt glides.

FINISHES: Base: Metallic Silver, #90



Laminate Top



Base

Top: Laminate: Nevamar, Clear Maple WM8340T



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: OT7

QTY: 7

ITEM: End Table

LOCATION: Family Space 205A, Children's Services 210, Mother's Room 210.2, Family Study 226, Family Study 228

MANUFACTURER: Arcadia

MODEL NUMBER: Betwixt End Table
2300-1920

DESCRIPTION: 19"dia x 16"h
Round end table with laminate top with wood edge and metal rod base with felt glides.

FINISHES: Base: Metallic Silver, #90



Laminate Top

Top: Laminate: Nevamar, Clear Maple WM8340T



Base



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: OT8

QTY: 1

ITEM: Coffee Table


LOCATION: Family Space 205A

MANUFACTURER: Mediatechnologies

MODEL NUMBER: Full Time Ottable Jr Height Table
FTDTJ-51

DESCRIPTION: 51"dia x 16"h
Round fully upholstered ottoman with laminate top, pvc edge with ABS self leveling glides.

FABRIC:



Mfg: Mayer Fabrics
Pattern: Slick
Color: Calypso SL-043
Width: 54"
Repeat: N/A
Contents: 100% Vinyl with Urethane Topcoat
Abr. Res.: 1,000,000 double rubs
Finish: Silverguard, Permablok, Permaguard
Fabric Qty: Verify Fabric Quantity with Pattern repeat



Laminate Top



PVC Edge

Laminate: Formica, White Drops, 8824-58

PVC Edge: Moroccan, C700190



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power

ITEM NO:	PWR1
QTY:	2
ITEM:	Power Station
LOCATION:	Lounge 122, Teen Area 202
MANUFACTURER:	ECA by Dekko
MODEL NUMBER:	Isle G2 Mobile Power/USB Charging Station ISL-12U3AC-S108
DESCRIPTION:	18"Dia x 25.5"H Powered mobile charging station with wrap around integrated cord management at base. (12) 3-prong receptacles, (3) USB-A ports, (3) USB-C ports, 9' power cord.
FINISHES:	Silver Pearl



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: R1

QTY: 2

ITEM: Area Rug

LOCATION: Program Room 204

MANUFACTURER: Gressco by HABA

MODEL NUMBER: Colorful Fields Rug
348623

DESCRIPTION: 110.25"w x 78.75"l x .25"h
100% polyacrylic rug with textile back.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	SC1
QTY:	1
ITEM:	Storage Cabinet
LOCATION:	Stor. 137.2
MANUFACTURER:	Global Industries
MODEL NUMBER:	All Welded Heavy Duty Storage Cabinet 316056
DESCRIPTION:	48"w x 24"d x 72"h Steel cabinet with doors and four adjustable shelves. Cabinet can be locked with a padlock.
FINISHES:	Gray



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: SCR1

QTY: 1

ITEM: Acrylic Screen

LOCATION: Secure Research Room 339

MANUFACTURER: SitOnIt

MODEL NUMBER: Sector Acrylic Screen
3090 MT4 DT101 DS1248

DESCRIPTION: 48"W x 12"h
Frosted acrylic screen with freestanding feet, screen to sit on table top and can be freely moved around. (Do not install with tape).

FINISHES: Leg: Freestanding

Note: Refer to T24 specification sheet for table .



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: SH1

QTY: 1

ITEM: Shelving Unit

LOCATION: Stor. 137.2

MANUFACTURER: Uline

MODEL NUMBER: Plastic Shelving Unit

DESCRIPTION: 66"w x 24"d x 75"h
Plastic heavy duty shelving unit with four shelves.

FINISHES: Gray



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T1 T1P

QTY: T1: 1
T1P: 2

ITEM: Study Table, Pwr

LOCATION: Lounge 122

MANUFACTURER: Studio TK

MODEL NUMBER: Bevy Round Work Pedestal Table

T1: STETWE29N-B-FL-10776-60-P-F-60 (SPECIAL)

T1P: STETWE29D-B-FL-10776-60-P-F-60-STYDB-P-7Y (SPECIAL)

DESCRIPTION: 48"dia x 29"h
Round study table with laminate top and metal 4-prong pedestal base with levelers.
T1P Power: Single Round Power Bump with 1 receptacle and 2 USB and cable manager on table leg.

FINISHES: Base: Platinum 60


Top: Laminate: Wilsonart, Kensington Maple 10776-60 (SPECIAL)

Edge Style: To match top

Power: Single Round Power Bump with 1 Simplex, 2 USB (STYD),
Finish: 7Y(STORM WHITE)



Laminate Top



Base



Power Unit



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T2 T2P

QTY: T2: 2
T2P: 2

ITEM: Study Table, Pwr

LOCATION: Lounge 122

MANUFACTURER: Studio TK

MODEL NUMBER: Bevy Square Work Pedestal Table

T2: STETOC29N-B-FL-10776-60-P-F-60 (SPECIAL)

T2P: STETOC29D-B-FL-10776-60-P-F-60-STYDB-P-7Y (SPECIAL)

DESCRIPTION: 36"w x 36"d x 29"h

Square study table with laminate top and metal 4-prong pedestal base with levelers.

T2P Power: Single Round Power Bump with 1 receptacle and 2 USB and cable manager on table leg.

FINISHES: Base: Platinum 60



Laminate Top

Top: Laminate: Wilsonart, Kensington Maple 10776-60 (SPECIAL)

Edge Style: To match top



Base

Power: Single Round Power Bump with 1 Simplex, 2 USB (STYD),
Finish: 7Y(STORM WHITE)



Power Unit



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO. T3
QTY: 16

ITEM: Height Adjustable Flip/Nest Table
LOCATION: Maker Space 137

MANUFACTURER: 3Branch

MODEL NUMBER: Maker Flex Height Adjustable Flip/Nest Table
MF-7236-NEST-ADJT-BBK-CAS

DESCRIPTION: 72"w x 36"d x 27" - 41"h
Rectangle crank height adjustable fliptop nesting table, top in solid maple
butcher block and powder coated steel T-legs with casters. Removable
hand crank.

FINISHES: Metal: Platinum Metallic



Top



Metal



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO. T4
QTY: 4

ITEM: Height Adjustable Flip/Nest Table
LOCATION: Maker Space 137

MANUFACTURER: 3Branch

MODEL NUMBER: Maker Flex Height Adjustable Flip/Nest Table
MF-7230-NEST-ADJT-BBK-CAS

DESCRIPTION: 72"w x 30"d x 27" - 41"h
Rectangle crank height adjustable fliptop nesting table, top in solid maple
butcher block and powder coated steel T-legs with casters. Removable
hand crank.

FINISHES: Metal: Platinum Metallic



Top



Metal



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO. T5
QTY: 3

ITEM: Mobile Storage Unit
LOCATION: Maker Space 137

MANUFACTURER: 3Branch

MODEL NUMBER: Maker Storage
MST-603036-DOM-BBK

DESCRIPTION: 60"w x 30"d x 36"h
Storage table with 2 plastic laminate door cabinet modules, top in solid maple butcher block and welded powder coated stainless steel frame with heavy-duty Totalock casters. Top has 3" overhang on each side.

FINISHES: Metal: Platinum Metallic



Top

Top: Maple Butcherblock

Laminate: Wilsonart, Kensington Maple, 10776-60



Metal



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T6

QTY: 71

ITEM: Flip/Nest Table


LOCATION: Training Room 106, Training Room 107, Training Room 107B, Meeting Room 121, Training/Green Room 410

MANUFACTURER: Enwork

MODEL NUMBER: Zori - Flip/Nest
CYRS2460A-SNBNNA

DESCRIPTION: 24"d x 60"w x 29"h
Rectangle flip/nest training table with laminate top, pvc edge and standard casters (N) in black (B) finish.

FINISHES: Leg: Silver (S)



Laminate Top
& Edge Band



Metal

Top: Kensington Maple 10776-60 (A)

Edge Style: 3mm edge

Edge Color: Kensington Maple



Shown with power

NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	T7P
QTY:	15
ITEM:	Flip/Nest Table, Pwr
LOCATION:	Training 113
MANUFACTURER:	KI
MODEL NUMBER:	Pirouette - Flip/Nest Table PINR2460T-74P (S21315645)-1VM-PERF MTL-EKM-LKM-SX-SX-4EC Reference Quote #: 21JG-552534/C
DESCRIPTION:	24"d x 60"w x 29"h Rectangle flip/nest training table with laminate top, pvc edge, perforated metal modesty panel and casters. Table to have (1) Villa power module with Activ8 electrical system for daisy chaining tables, wire trough manager and vertical wire manager. Table at window wall to include vertical wire manager and plug end of power module (infeed).
FINISHES:	Metal: Starlight Silver Metallic, SX Top: Kensington Maple, LKM Edge Style: Poly edge, 74P Edge Color: Kensington Maple, EKM
	Power & Accessories: Activ8 Villa Grommet, Starlight Silver: AC8VMC-SX (Qty: 15) Infeed: AC8IF.108 (Qty: 5) Jumper: AC8JP.77 (Qty: 10) Vertical Wire Manager, Starlight Silver: 46.5836-SX (Qty: 5) Wire Trough 44", Starlight Silver: PI.TROUGH.60-SX (Qty: 15)



Laminate Top
& Edge Band




Villa Power



Active8



Modesty Panel



Wire Trough



Flip/Nesting



Flipped Modesty Panel



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO. T8
QTY: 8

ITEM: Height Adjustable Flip Nesting Table


LOCATION: Program Room 206

MANUFACTURER: KI

MODEL NUMBER: Trek Height Adjustable Flip Nesting Table
T36FT-74P (S21314395)-EKM-LKM-SX-4CB
Reference Quote #: 21JG-552534/C

DESCRIPTION: 36"d x 72"w x 23" - 32"h (SPECIAL HEIGHT ADJ.)
Rectangle shape table with plastic laminate top and pvc edge on pin
height adjustable flip nesting T-legs with casters.

FINISHES: Leg: Starlight Silver Metallic, SX



Laminate Top



Metal

Top: Kensington Maple, LKM

Edge Style: Poly edge, 74P

Edge Color: Kensington Maple, EKM



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T9P

QTY: 2

ITEM: Study Table, 4 Person, Pwr

LOCATION: Tech Core 221

MANUFACTURER: Enwork

MODEL NUMBER: Impression Rectangle Fixed Table w/ Acrylic Screen
CR3672AXA-LPP2NS-LPP2NS-LPCMS-LPCMS-PDCO2S-PDCO2S-
PDGR-PDGR-XFLPA72-004

DESCRIPTION: 36"d x 72"w x 29"h
Rectangle table with laminate top, vinyl edge and four metal legs.
Include two PDCO2 power modules with coordinating electrical cutout in center back to back on each side of privacy screen, two Impression cable management covers on legs, two universal cable grippers under worksurface.
XFLPA72-004 Clamp Frosted Acrylic Privacy Screen (72"W x 13"H)


FINISHES:

Leg: Silver (S)

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple (A) 10776-60



Laminate Top



Metal

Power: PDCO2 : Cove, Corded, 2 Power/2 Charging USB,
9' power cord with 2 extra plugs on bottom (Qty: 2)
FINISH: Silver with black receptacles (S)
PDGR - Universal Cable Gripper, 5 openings (Black) (Qty: 2)
LPCMS: Impression Cable Management Cover (Qty: 2)



Power Module



Cable Grippers




Acrylic Screen



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	T10 T10P
QTY:	T10: 5 T10P: 7
ITEM:	Study Table, 4 Person, Pwr
LOCATION:	Study / Collab. 220.1, Quiet Reading 220.2, Reading 217, Genealogy Archives 311, Atrium 321
MANUFACTURER:	Enwork
MODEL NUMBER:	Impression Rectangle Fixed Table T10: CR3672ANA-LPP2NS-LPP2NS T10P: CR3672AKA-LPP2NS-LPP2NS-PDCO2S-PDGR-PDGR-LPCMS-LPCMS
DESCRIPTION:	36"d x 72"w x 29"h Rectangular table with laminate top, vinyl edge, four metal legs. T10P: Include PDCO2 power with coordinating electrical cutout in center (K), two Impression cable management covers on legs, two universal cable grippers under worksurface.
FINISHES:	Leg: Silver (S) Top: Kensington Maple (A) 10776-60 Edge Style: 3MM Edge (A) Edge Color: Kensington Maple 10776-60 Power: PDCO2 : Cove, Corded, 2 Power/2 Charging USB, 9' power cord with 2 extra plugs on bottom FINISH: Silver with black receptacles (S) PDGR - Universal Cable Gripper, 5 openings (Black) (Qty: 2) LPCMS: Impression Cable Management Cover (Qty: 2)



Laminate Top



Metal



Power Module



Cable Grippers



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	T11P
QTY:	6
ITEM:	Study Carrel, Pwr
LOCATION:	Genealogy Archives 311
MANUFACTURER:	Steelcase
MODEL NUMBER:	Brody Privacy Desk 488BD-Medium-1077960-5G57-plastic trim-6559 Satin Ice Acrylic-Power/ USB 4799-Dash Mini LED Light 4710
DESCRIPTION:	Overall: 43"w x 36.125"d x 48.5"h / Worksurface: 39"w x 24.5"d x 28.5" / Screen: 23.5"h Privacy desk with laminate top, vinyl edge, acrylic privacy screen, uphol- stered lower surround, metal legs with leveling glides, power in worksur- face and LED light.


FINISHES: Trim: Medium (Platinum Metallic 4799)



Laminate Top



Metal



Fabric

Top: Kensington Maple 10776-60

Edge Color: To Match Top, Kensington Maple 10776-60

Fabric: Buzz 2, Rouge 5G57

Power: One USB 2.0 Outlet, One NEMA 3-prong outlet, 10' power
cord with 1 extra plug on bottom, Platinum Metallic 4799

Light: Dash Mini LED Light, Low Gloss Black 4710




Power Module



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO.	T12 T12P
QTY:	T12: 4 T12P: 5
ITEM:	Study Table, 2 Person, Pwr
LOCATION:	Study 212, Study 213, Stacks 218, Quiet Reading 220.2, Atrium 321
MANUFACTURER:	Enwork
MODEL NUMBER:	Impression Square Table T12: CR3636ANA-LPP2NS-LPP2NS T12P: CR3636AKA-LPP2NS-LPP2NS-PDC02-LPCMS-LPCMS-PDGR
DESCRIPTION:	36"w x 36"d x 29"h Square table with laminate top, vinyl edge four metal legs with standard glides. T12P: Include PDC02 power with coordinating electrical cutout in center (K) and two Impression cable management covers on legs, one universal cable gripper under worksurface.
FINISHES:	Leg: Silver (S) Top: Kensington Maple (A) 10776-60 Edge Style: 3MM Edge Band (A) Edge Color: Kensington Maple 10776-60 Power: PDC02 : Cove, Corded, 2 Power/2 Charging USB, 9' power cord with 2 extra plugs on bottom (Qty: 1) FINISH: Silver with black receptacles (S) PDGR - Universal Cable Gripper, 5 openings (Black) (Qty: 1) LPCMS: Impression Cable Management Cover (Qty: 2)



Laminate Top



Metal



Power Module



Cable Grippers




NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	T13 T13P
QTY:	T13: 3 T13P: 2
ITEM:	Study Table, 4 Person
LOCATION:	Teen Area 202, Study 211, Stacks 218, Quiet Reading 220.2
MANUFACTURER:	Enwork
MODEL NUMBER:	Impression Round Fixed Table T13: R48ANA-LXPDS T13P: R48AKA-LX3PDS-PDC02
DESCRIPTION:	48" dia x 29"h Round table with laminate top, vinyl edge, metal X-base with levelers. T13P: Include PDC02 power with coordinating electrical cutout in center (K) and metal X-base with power/data top plate including mouse hole at bottom of post for cable management/power access.

FINISHES:



Laminate Top



Metal

Leg: Silver (S)
Top: Kensington Maple (A) 10776-60
Edge Style: 3MM Edge (A)
Edge Color: Kensington Maple 10776-60
Power: PDC02 : Cove, Corded, 2 Power/2 Charging USB, 9' power cord with 2 extra plugs on bottom (Qty: 1)
FINISH: Silver with black receptacles (S)



X-Base, shown w/ mouse hole



Shown w/ power

NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T14

QTY: 3

ITEM: Study Table, 2 Person

LOCATION: Teen Area 202, Hispanic Resource Center 314

MANUFACTURER: Enwork

MODEL NUMBER: Impression Round Fixed Table
R42ANA-LXPDS

DESCRIPTION: 42" dia x 29"h
Round table with laminate top, vinyl edge, metal X-base with levelers.


FINISHES:

Leg: Silver (S)

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple 10776-60



Laminate Top



Metal



X-Base, shown w/ mouse hole



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T15P

QTY: 1

ITEM: Study Table, Pwr

LOCATION: Family Study 227

MANUFACTURER: Enwork

MODEL NUMBER: Zori Rectangle Table
CR3060AKA-CYSSL4YS-PDC02-PDGR

DESCRIPTION: 30"d x 60"w x 29"h
Rectangular table with laminate top, pvc edge, support brace and four powder coated metal legs, one leg to have routing hole (Y). Include PDCO2 power with coordinating electrical cutout in center, and cable grippers for underside wire management.

FINISHES: Leg: Silver (S)



Laminate Top



Metal

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple 10776-60

Power: PDC02 : Cove, Corded, 2 Power/2 Charging USB,
9' power cord with 2 extra plugs on bottom (QTY: 1)
FINISH: Silver with black receptacles (S)
PDGR - Universal Cable Gripper, 5 openings (Black) (Qty: 1)



Power Module



Shown as Rounded Square

NOTE: All images are for reference only. Refer to product specifications for actual requirements
P: Denotes power in table

ITEM NO: T16

QTY: 5

ITEM: Study Table

LOCATION: Children's Services 210, Family Study 227, Family Study 228

MANUFACTURER: Enwork

MODEL NUMBER: Zori Square Table
CR2424ANA-CYS24L4NS

DESCRIPTION: 24"d x 24"w x 24"h
Square table with laminate top, pvc edge and four powder coated metal legs.

FINISHES:

Leg: Silver (S)

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)
Edge Color: Kensington Maple 10776-60



Laminate Top



Metal



Shown as Rounded Square

NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T17

QTY: 3

ITEM: Study Table, 1 Person


LOCATION: Genealogy Archives 311

MANUFACTURER: Enwork

MODEL NUMBER: Impression Square Fixed Table
CR6060AXA-LPP2NS-LPP2NS-LPP2NS-GRMB-GRMB-PDGR-LPCMS-LPCMS

DESCRIPTION: 60"d x 60"w x 29"h
Square table with laminate top with undersurface braces, vinyl edge and six metal legs. Provide two grommets one center right and one center left for owner provided equipment, Universal cable grippers mounted to underside of top and two cable management leg covers.

FINISHES: Leg: Silver (S)



Laminate Top



Metal

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple (A) 10776-60

Accessories: GRMB - Grommet (Qty: 2)

PDGR - Universal Cable Gripper, 5 openings (Black) (Qty: 1)

LPCMS: Impression Cable Management Cover (Qty: 2)



NOTE: All images are for reference only. Refer to product specifications for actual requirements
P: Denotes power in table

ITEM NO: T18P

QTY: 3

ITEM: Study Table, Pwr

LOCATION: Family Space 205A, Children's Services 210

MANUFACTURER: Enwork

MODEL NUMBER: Zori Round Table
R48AKA-CYSSL4YS-PDC02S-PDGR

DESCRIPTION: 48"dia x 29"h
Round table with laminate top, pvc edge and four powder coated metal legs. Include PDCO2 power with coordinating electrical cutout in center (K), cable grippers for underside wire management and one routing hole leg (Y).

FINISHES: Leg: Silver (S)



Laminate Top



Metal

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple 10776-60

Power: PDC02 : Cove, Corded, 2 Power/2 Charging USB,
9' power cord with 2 extra plugs on bottom (QTY: 1)
FINISH: Silver with black receptacles (S)
PDGR - Universal Cable Gripper, 5 openings (Black) (Qty: 1)



Power Module



Cable Grippers



Shown as Rounded Square

NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T19

QTY: 4

ITEM: Study Table

LOCATION: Family Space 205A, Children's Services 210

MANUFACTURER: Enwork

MODEL NUMBER: Zori Round Table
R48ANA-CYS24L4NS

DESCRIPTION: 48"dia x 24"h
Round table with laminate top, pvc edge and four powder coated metal legs.

FINISHES: Leg: Silver (S)



Laminate Top

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple 10776-60



Metal



Shown as Rounded Square

NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO:	T20
QTY:	1
ITEM:	Interactive Table
LOCATION:	Family Space 205A
MANUFACTURER:	TMC
MODEL NUMBER:	Alphabet Table TC42M20P24MD-01
DESCRIPTION:	42" Dia x 24" H Bent plywood table with plover legs and maple finish.
FINISHES:	As shown



NOTE: All images are for reference only. Refer to product specifications for actual requirements
P: Denotes power in table

ITEM NO: T21P

QTY: 6

ITEM: Craft Table, Pwr

LOCATION: Teen Area 202, Children's Services 210

MANUFACTURER: KI

MODEL NUMBER: Ruckus Work Table
RCWT485436CDR-74P-LRI-ECG-WPC2-P2-BH-SX-FSX-S5-KA-SCL-L109 Reference Quote #: 21JG-552534/C

DESCRIPTION: 48"d x 54"w x 35.75"h / 30"d x 36"w Storage Cabinet
Double face rectangle work table with laminate top, pvc edge, metal storage cabinet with locking doors and one adjustable shelf, four chrome book bag hooks and four heavy duty rubber casters, two locking. Include under surface Dean power module with two power and two USB-A ports, two modules per unit, Cool Grey (P2) and wire management. All units to be keyed alike (L109).

FINISHES: Leg: Starlight Silver Metallic (SX)

Top: Crisp Linen (LRI)

Edge Style: 74P

Edge Color: Cool Grey (ECG)

Pulls: Satin Chrome

Power: Dean power module with two power and two USB-A ports, two modules per unit and wire management, Cool Grey (P2), 10' cord.



Laminate Top



Metal



Power



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: T22

QTY: 34

ITEM: Round Folding Table

LOCATION: Event Space 408


MANUFACTURER: Mitylite

MODEL NUMBER: ABS Round Folding Table
CT72GRB0200060000

DESCRIPTION: 72"dia. x 29"h
High impact ABS round plastic top with ABS plastic edge and folding wishbone metal legs with glides.

FINISHES: Top: Grey

Base: Black



Top



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO: T23

QTY: 94

ITEM: Rectangle Folding Table

LOCATION: Event Space 408


MANUFACTURER: Mitylite

MODEL NUMBER: ABS Rectangle Folding Table
RT2460GRB0201060000

DESCRIPTION: 24"d x 60"w x 29"h
High impact ABS rectangle plastic top with ABS plastic edge and folding wishbone metal legs with glides.

FINISHES: Top: Grey

Base: Black Sand



Top



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T24

QTY: 1

ITEM: Study Table, 2 Person

LOCATION: Secure Research Room 339

MANUFACTURER: Enwork

MODEL NUMBER: Impression Rectangle Fixed Table
CR4860ANA-LPP2NS-LPP2NS

DESCRIPTION: 48"d x 60"w x 29"h
Rectangle table with laminate top, vinyl edge and four metal legs.

Table to receive freestanding acrylic screen SCR1. Do not double tape to table.


FINISHES:

Leg: Silver (S)

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple (A) 10776-60



Laminate Top



Metal

Acrylic
Screen: Refer to SCR1 specification sheet for acrylic screen.



NOTE: All images are for reference only. Refer to product specifications for actual requirements

P: Denotes power in table

ITEM NO: T25

QTY: 2

ITEM: Study Table, 2 Person

LOCATION: Secure Research Room 339

MANUFACTURER: Enwork

MODEL NUMBER: Impression Rectangle Fixed Table
CR4860ANA-LPP2NS-LPP2NS

DESCRIPTION: 48"d x 60"w x 29"h
Rectangle table with laminate top, vinyl edge and four metal legs.

FINISHES:

Leg: Silver (S)

Top: Kensington Maple (A) 10776-60

Edge Style: 3MM Edge (A)

Edge Color: Kensington Maple (A) 10776-60

 Laminate Top

 Metal



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	TC1
QTY:	6
ITEM:	Circular Table Cart
LOCATION:	Storage 407
MANUFACTURER:	Mitylite
MODEL NUMBER:	CT Table Cart, Narrow CRTCT42-72BLK56
DESCRIPTION:	30.5"w x 50.5"l x 40.1"h Cart holds up to six round tables. Steel frame in powder coated finish.
FINISHES:	Black



NOTE: All images are for reference only. Refer to product specifications for actual requirements

ITEM NO:	TC2
QTY:	10
ITEM:	Rectangle Table Cart
LOCATION:	Storage 407
MANUFACTURER:	Mitylite
MODEL NUMBER:	RT Table Cart, Flat CRT18-60EBLK2
DESCRIPTION:	30"w x 74.5"l x 37.88"h Cart holds up to ten rectangle tables. Steel frame in powder coated finish.
FINISHES:	Black



Furniture Information List:

Company: 3Branch
Contact: Joe Frueh
Phone Number: 312.952.5436
Email: joe@3branch.com

Company: Arcadia
Contact: Russell Bielefeld
Phone Number: 330.726.6974
Email: russellbielefeld@msn.com

Company: Clarus
Contact: Kate Maron or Susan Rieser
Phone Number: 313.600.4282 / ??
Email: kate@greatapg.com /
susan@greatapg.com

Company: ECA
Contact: Teri Burich
Phone Number: 440.662.4317
Email: Teri@danbinford.com

Company: Enwork
Contact: Carrie Stary
Phone Number: 216.312.4389
Email: Carrie@blgreps.com

Company: Global Industries
Contact: Customer Service
Phone Number: 888.978.7759
Email: www.globalindustrial.com

Company: Gressco by HABA
Contact: Teri Burich
Phone Number: 440.662.4317
Email: Teri@danbinford.com

Company: JSI
Contact: Carrie Stary
Phone Number: 216.312.4389
Email: Carrie@blgreps.com

Company: KI
Contact: Robynn Spong
Phone Number: 216.401.7044
Email: robynn.spong@ki.com

Company: Kimball
Contact: Kirt Bauchman
Phone Number: 330.466.5645
Email: kirt.bachman@nationalofficefurniture.com

Company: National Office
Contact: Kirt Bauchman
Phone Number: 330.466.5645
Email: kirt.bachman@nationalofficefurniture.com

Company: Leland International
Contact: Karl Krauss
Phone Number: 440.935.5900
Email: karlekrauss1@gmail.com

Company: Mediatechnologies
Contact: Tracey Corbo
Phone Number: 440.949.9604
Email: tracey@timoneilassociates.com

Company: Mitylite
Contact: Mike Burrows
Phone Number: 385.429.5340
Email: mike.burrows@mityinc.com

Company: Peter Pepper Products
Contact: Ann Mather
Phone Number: 440.465.5317
Email: ann@bodkinsassociates.com

Company: Safco
Contact: Teri Burich
Phone Number: 440.662.4317
Email: Teri@danbinford.com

Company: Science Kinetics
Contact: Christopher Westhoff
Phone Number: 614.560.5984
Email: Chris@sciencekinetics.com

Company: SitOnIt Seating
Contact: Carrie Stary
Phone Number: 216.312.4389
Email: Carrie@blgreps.com

Company: Source International
Contact: Trevor Cooke
Phone Number: 614.778.9019
Email: dotsoncooke2@gmail.com

Company: Steelcase
Contact: Stephen Stefancin
Phone Number: 440.773.3035
Email: Stephen.Stefancin@steelcase.com

Furniture Information List:

Company: Studio TK
Contact: Dani Terrell
Phone Number: 773.835.1583
Email: dani.terrell@studiotk.com

Company: Trinity
Contact: Tracey Corbo
Phone Number: 440.949.9604
Email: tracey@timoneilassociates.com

Company: TMC
Contact: Christine Groh
Phone Number: 513.716.0362
Email: cgroh@grohcr.com

Company: Vitra
Contact: Karl Krauss
Phone Number: 440.935.5900
Email: karlekrauss1@gmail.com

Company: V/S America
Contact: Kristen Humphries (Ohio)
Phone Number: 317.437.7944
Email: k.humphries@vsamerica.com

Company: **Store More Store**
Contact: **Customer Service**
Phone Number: **1.855.786.7667**
Email: **www.storemorestore.com**

Company:
Contact:
Phone Number:
Email:

Company:
Contact:
Phone Number:
Email:

Company:
Contact:
Phone Number:
Email:

Fabric Information List:

Company: ArcCom Fabrics
Contact: Amy Rizzo
Phone Number: 440.865.9509
Email: Arizzo@arc-com.com

Company: Mayer Fabrics
Contact: Kellie Johns
Phone Number: 330.808.2786
Email: kellie.johns@mayerfabrics.com

Company: Momentum Textiles
Contact: Courtney Bell
Phone Number: 800.366.6839 x867
Email: cbell@momtex.com

Company: Sina Pearson
Contact: Courtney Bell
Phone Number: 800.366.6839 x867
Email: cbell@momtex.com

Company:
Contact:
Phone Number:
Email:

Company:
Contact:
Phone Number:
Email:

Company:
Contact:
Phone Number:
Email:

Company:
Contact:
Phone Number:
Email:

Rawlings Library
Renovation

100 E. Abriendo Avenue, Pueblo,
CO 81004
20-015

Pueblo City-County Library District

Attn: Jon Walker, Executive Director
100 E. Abriendo Avenue
Pueblo, CO 81004
Telephone: 719-562-5633
FAX: n/a
E-mail: jon.walker@pueblolibrary.org

Architect

AndersonMasonDale Architects, P.C.
3198 Speer Boulevard
Denver, CO 80211
Telephone: 303-294-9448
FAX: 303-294-0762
E-mail (optional)

Interior Design

HBM Architects
1382 W 9th St. Ste. 300
Cleveland, OH 44113
Telephone: 216-241-1100

Civil

S.A. Miro
4582 S. Ulster Street, Ste. 750
Denver, CO 80227
Telephone: 303-741-3737

Landscape

Werk Associates Inc.
1130 31st St. #101
Denver, CO 80205
Telephone: 303-428-0003
FAX: 303-428-0004

Structural

KL&A, Inc.
1717 Washington Ave.
Golden, CO 80401
Telephone: 303-384-0910
FAX: 303-384-9915

Mechanical & Plumbing

The Ballard Group, Inc.
2525 S Wadsworth Blvd. Ste 200
Lakewood, CO 80227
Telephone: 303-988-4514

Electrical

Cator Ruma & Associates, Co.
896 Tabor
Lakewood, CO 80401
Telephone: 303-232-8200

Security/IT/AV/Acoustics


K2
5777 Central Ave. Suite #225
Boulder, CO 80301
Telephone: 303-865-5500
FAX: 303-865-5504

Issue	Date
SCHEMATIC DESIGN	13 NOV 2020
DESIGN DEVELOPMENT	8 MAR 2021
PROGRESS	24 MAR 2021
90% CD SET	21 MAY 2021
CONSTRUCTION DOCUMENTS	4 JUNE 2021
PR 003	28 OCT 2021
ASH-008	16 NOV 2021
FURNITURE ADDENDUM #3	19 NOV 2021

Project Number:	20-015
Drawn By:	M. MARINELLI
Reviewed By:	B. BREINER
Approved By:	J. SHOOK

FURNITURE PLAN - LEVEL 1

A-161 N

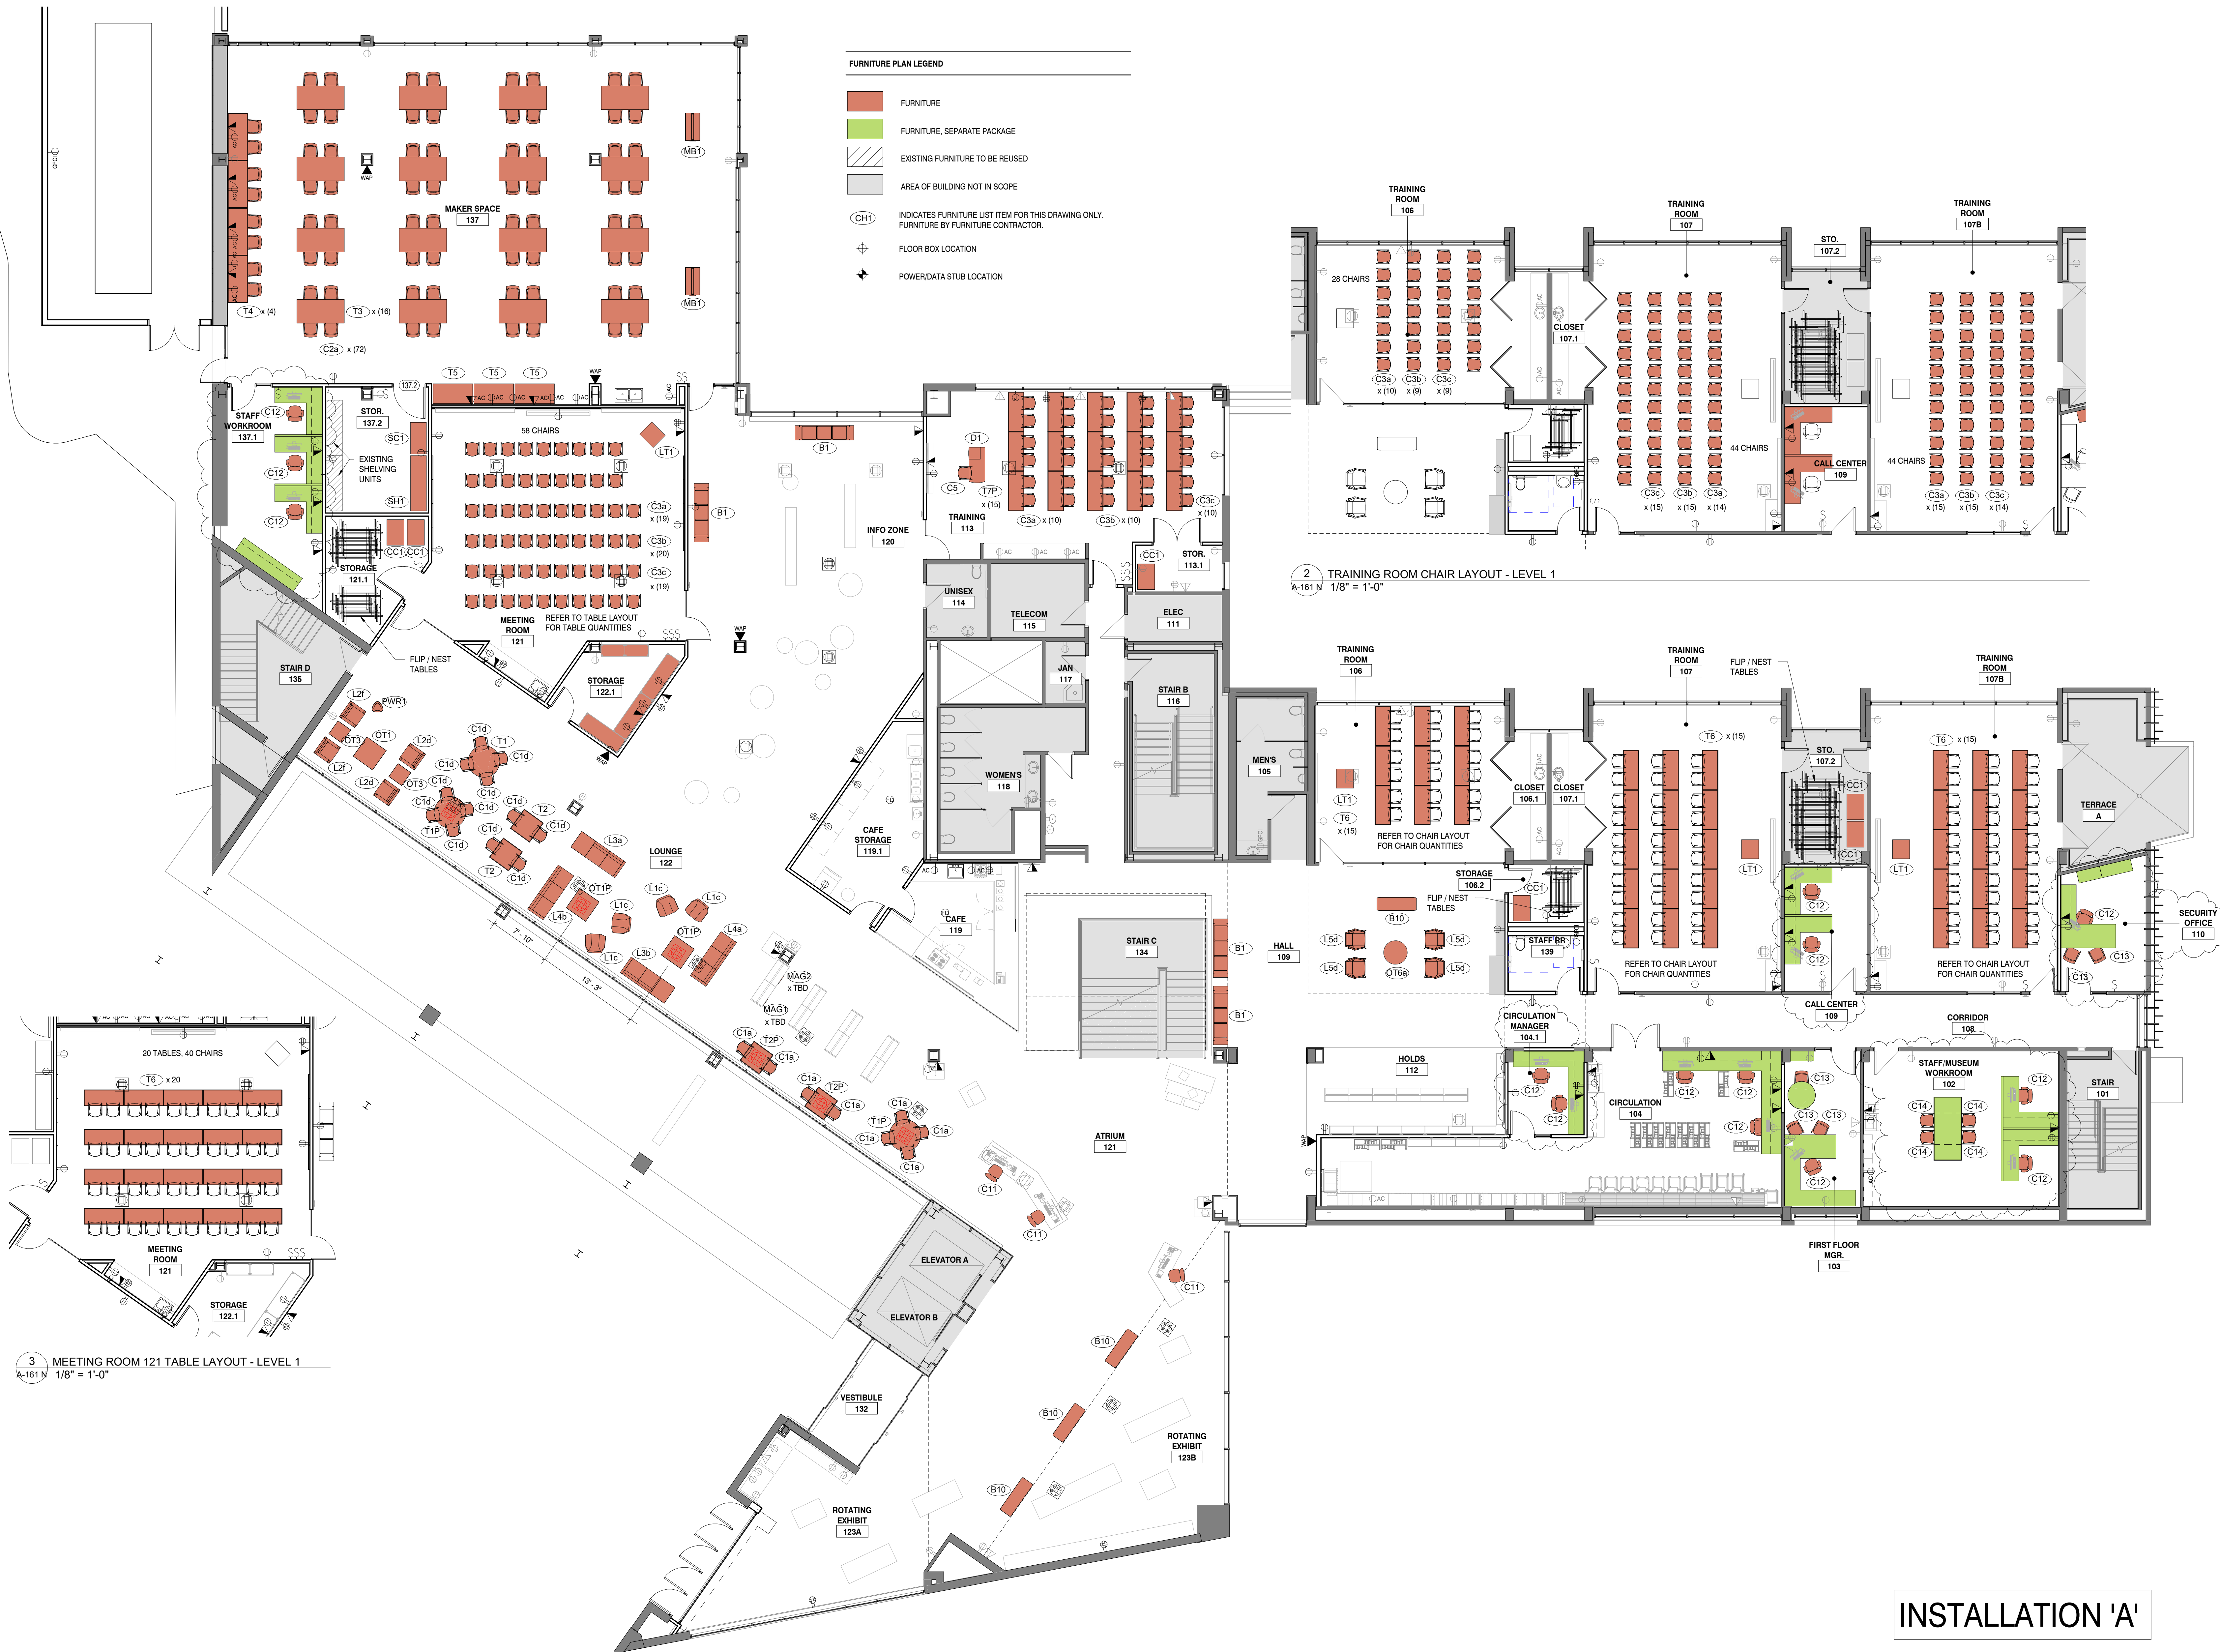


3 MEETING ROOM 121 TABLE LAYOUT - LEVEL 1
A-161 N 1/8" = 1'-0"

2 TRAINING ROOM CHAIR LAYOUT - LEVEL 1
A-161 N 1/8" = 1'-0"

INSTALLATION 'A'

FURNITURE PLAN - LEVEL 1



FOR REFERENCE ONLY



- FURNITURE PLAN LEGEND**
- FURNITURE
 - FURNITURE, SEPARATE PACKAGE
 - EXISTING FURNITURE TO BE REUSED
 - AREA OF BUILDING NOT IN SCOPE
 - CH1 INDICATES FURNITURE LIST ITEM FOR THIS DRAWING ONLY. FURNITURE BY FURNITURE CONTRACTOR.
 - FLOOR BOX LOCATION
 - POWER/DATA STUB LOCATION

INSTALLATION 'A'

FURNITURE PLAN - LEVEL 2

FOR REFERENCE ONLY

AndersonMasonDale
Architects

Rawlings Library
Renovation

100 E. Abriendo Avenue, Pueblo,
CO 81004
20-015

Pueblo City-County Library District

Attn: Jon Walker, Executive Director
100 E. Abriendo Avenue
Pueblo, CO 81004
Telephone: 719-562-5633
FAX: n/a
E-mail: jon.walker@pueblolibrary.org

Architect

AndersonMasonDale Architects, P.C.
3198 Speer Boulevard
Denver, CO 80211
Telephone: 303-294-9448
FAX: 303-294-0762
E-mail (optional)

Interior Design

HBM Architects
1382 W 9th St. Ste. 300
Cleveland, OH 44113
Telephone: 216-241-1100

Civil

S.A. Miro
4582 S. Ulster Street, Ste. 750
Denver, CO 80227
Telephone: 303-741-3737

Landscape

Werk Associates Inc.
1130 31st St. #101
Denver, CO 80205
Telephone: 303-428-0003
FAX: 303-428-0004

Structural

KL&A, Inc.
1717 Washington Ave.
Golden, CO 80401
Telephone: 303-384-0910
FAX: 303-384-9915

Mechanical & Plumbing

The Ballard Group, Inc.
2525 S Wadsworth Blvd. Ste. 200
Lakewood, CO 80227
Telephone: 303-868-4514

Electrical

Cator Ruma & Associates, Co.
896 Tabor
Lakewood, CO 80401
Telephone: 303-232-6200

Security/IT/AV/Acoustics

K2
5777 Central Ave. Suite #225
Boulder, CO 80301
Telephone: 303-865-5500
FAX: 303-865-5504

LEVEL 2 NORTH

Issue

Date

SCHEMATIC DESIGN	13 NOV 2020
DESIGN DEVELOPMENT	8 MAR 2021
PROGRESS	24 MAR 2021
90% CD SET	21 MAY 2021
CONSTRUCTION DOCUMENTS	4 JUNE 2021
PR 003	28 OCT 2021
ASH-008	16 NOV 2021
FURNITURE ADDENDUM #3	19 NOV 2021

Project Number:

20-015

Drawn By:

M. MARINELLI

Reviewed By:


B. BREINER

Approved By:

J. SHOOK

FURNITURE PLAN - LEVEL 2

A-162 N

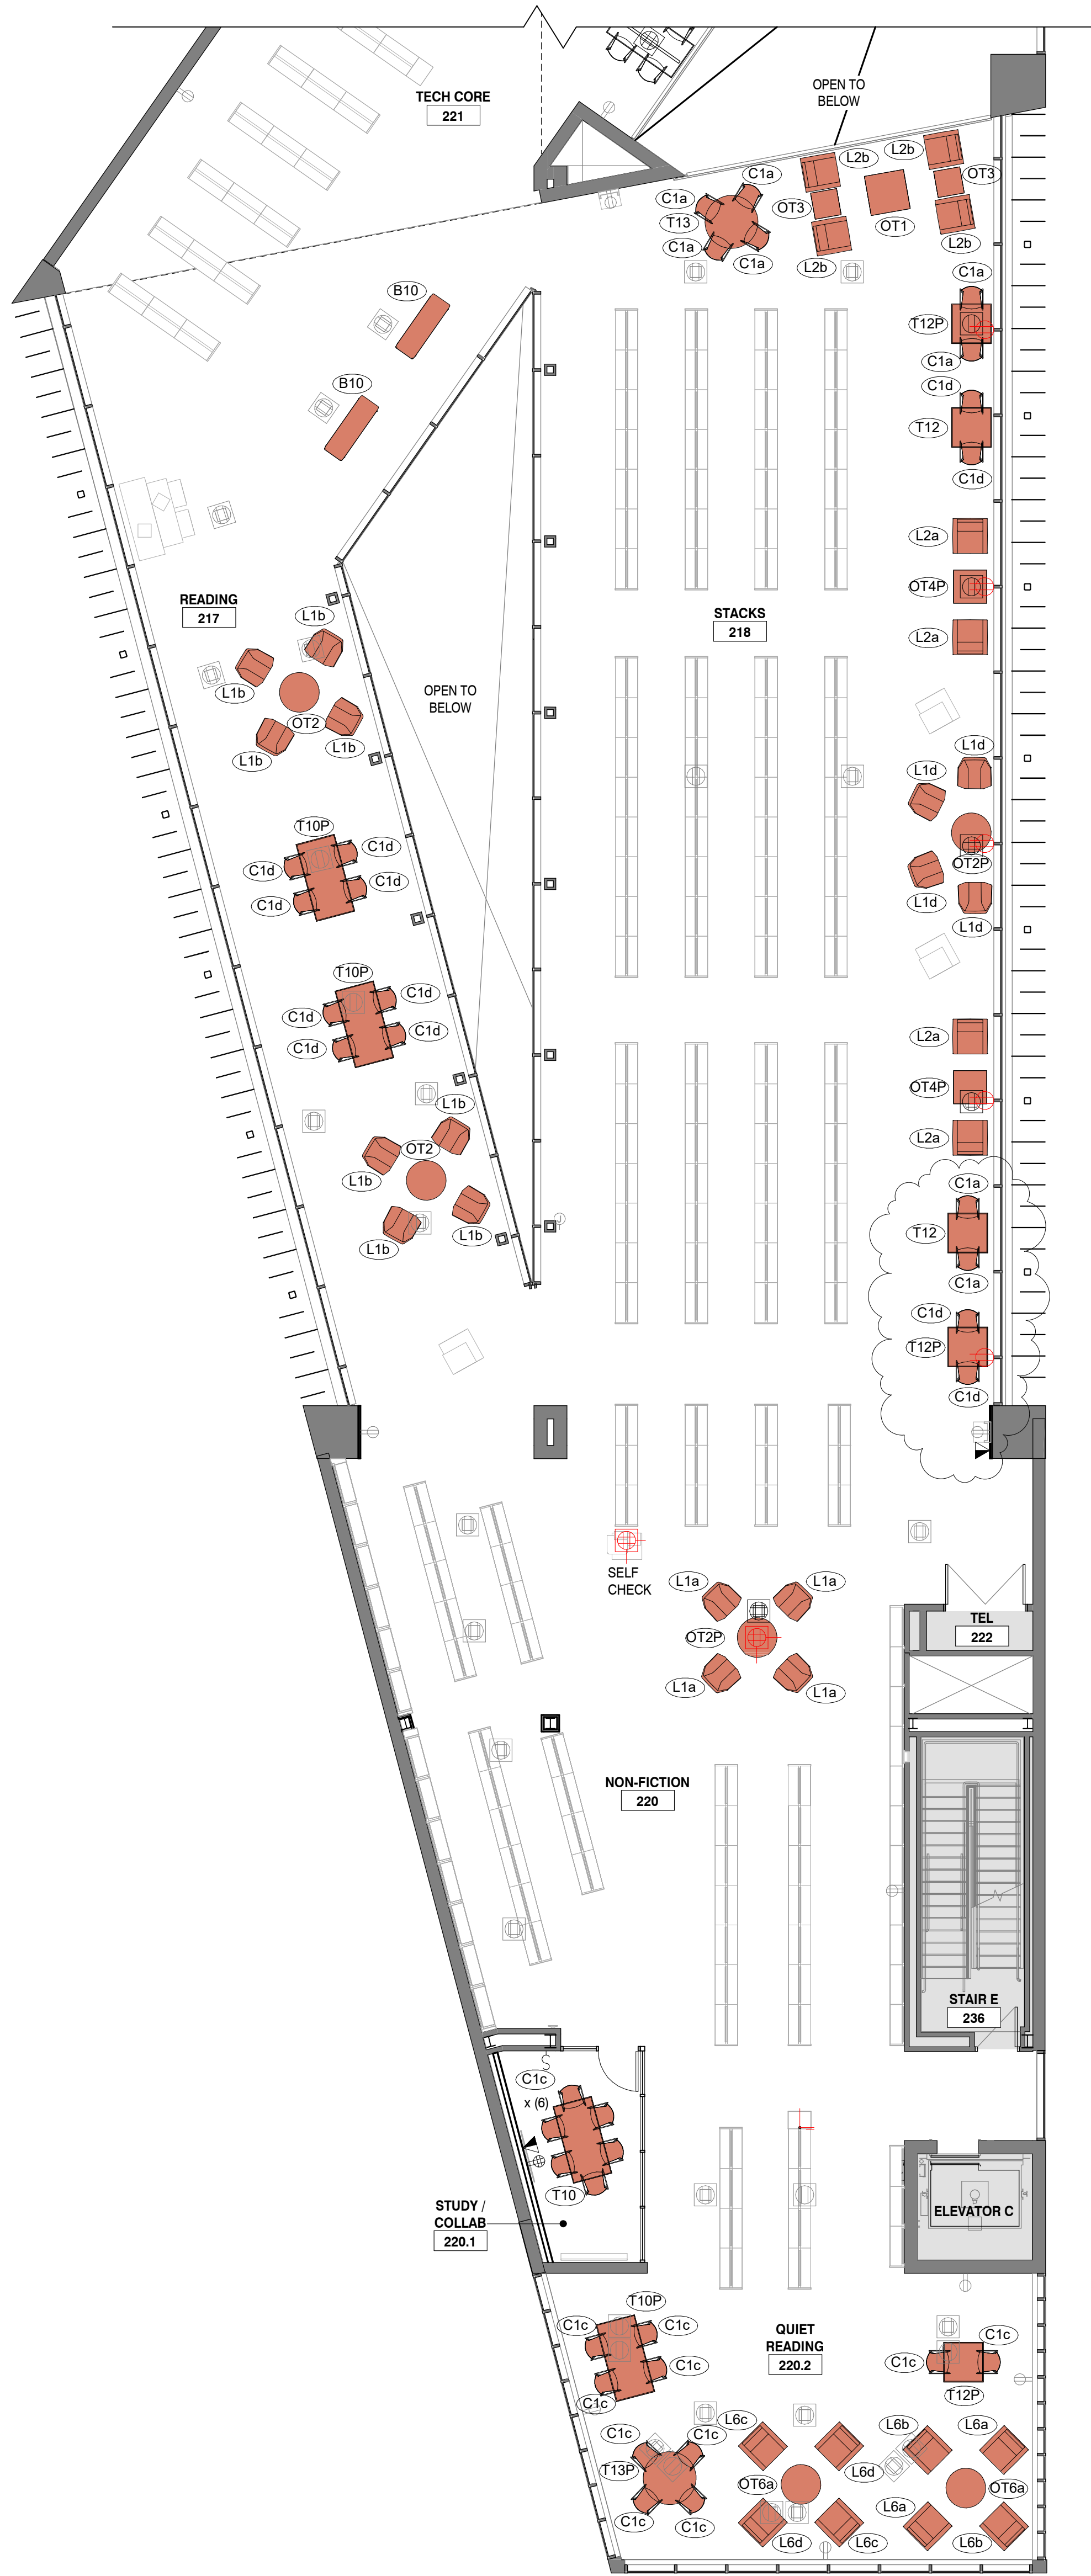

- FURNITURE PLAN LEGEND
- FURNITURE
 - FURNITURE, SEPARATE PACKAGE
 - EXISTING FURNITURE TO BE REUSED
 - AREA OF BUILDING NOT IN SCOPE
 - INDICATES FURNITURE LIST ITEM FOR THIS DRAWING ONLY. FURNITURE BY FURNITURE CONTRACTOR.
 - FLOOR BOX LOCATION
 - POWER/DATA STUB LOCATION

AndersonMasonDale Architects

Rawlings Library Renovation

100 E. Abriendo Avenue, Pueblo, CO 81004
20-015
Pueblo City-County Library District
Attn: Jon Walker, Executive Director
100 E. Abriendo Avenue
Pueblo, CO 81004
Telephone: 719-562-5633
FAX: n/a
E-mail: jon.walker@pueblolibrary.org

Architect
AndersonMasonDale Architects, P.C.
3198 Speer Boulevard
Denver, CO 80211
Telephone: 303-294-9448
FAX: 303-294-0762
E-mail (optional)

Interior Design
HBM Architects
1382 W 9th St. Ste. 300
Cleveland, OH 44113
Telephone: 216-241-1100

Civil
S.A. Miro
4582 S. Ulster Street, Ste. 750
Denver, CO 80227
Telephone: 303-741-3737


Landscape
Werk Associates Inc.
1130 31st St. #101
Denver, CO 80205
Telephone: 303-428-0003
FAX: 303-428-0004

Structural
KLSA, Inc.
1717 Washington Ave.
Golden, CO 80401
Telephone: 303-384-0910
FAX: 303-384-9915

Mechanical & Plumbing
The Ballard Group, Inc.
2525 S Wadsworth Blvd. Ste 200
Lakewood, CO 80227
Telephone: 303-868-4514

Electrical
Cator Ruma & Associates, Co.
896 Tabor
Lakewood, CO 80401
Telephone: 303-232-6200

Security/IT/AV/Acoustics
K2
5777 Central Ave. Suite #225
Boulder, CO 80301
Telephone: 303-865-5500
FAX: 303-865-5504

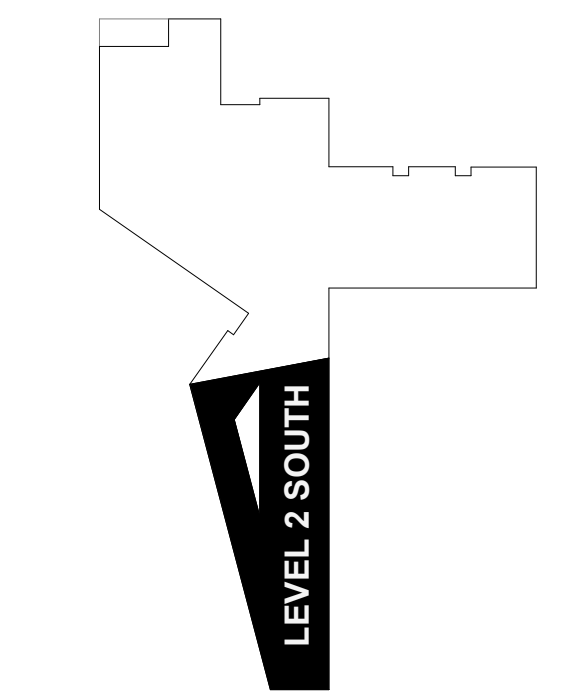

Issue	Date
SCHEMATIC DESIGN	13 NOV 2020
DESIGN DEVELOPMENT	8 MAR 2021
PROGRESS	24 MAR 2021
90% CD SET	21 MAY 2021
CONSTRUCTION DOCUMENTS	4 JUNE 2021
PR 003	28 OCT 2021
ASH-008	16 NOV 2021
FURNITURE ADDENDUM #3	19 NOV 2021

Project Number: 20-015
Drawn By: M. MARINELLI
Reviewed By: B. BREINER
Approved By: J. SHOOK

FURNITURE PLAN - LEVEL 2


A-162 S

INSTALLATION 'A'

FOR REFERENCE ONLY

FURNITURE PLAN - LEVEL 2

2 4 8 16 1/8" = 1'-0"



Rawlings Library
Renovation

100 E. Abriendo Avenue, Pueblo,
CO 81004
20-015

Pueblo City-County Library District

Attr: Jon Walker, Executive Director
100 E. Abriendo Avenue
Pueblo, CO 81004
Telephone: 719-562-5633
FAX: n/a
E-mail: jon.walker@pueblolibrary.org

Architect
AndersonMasonDale Architects, P.C.
3198 Speer Boulevard
Denver, CO 80211
Telephone: 303-294-9448
FAX: 303-294-0762
E-mail (optional)

Interior Design
HBM Architects
1382 W 9th St. Ste. 300
Cleveland, OH 44113
Telephone: 216-241-1100

Civil
S.A. Miro
4582 S. Ulster Street, Ste. 750
Denver, CO 80227
Telephone: 303-741-3737

Landscape
Wenk Associates Inc.
1130 31st St. #101
Denver, CO 80205
Telephone: 303-428-0003
FAX: 303-428-0004


Structural
KLSA, Inc.
1717 Washington Ave.
Golden, CO 80401
Telephone: 303-384-9910
FAX: 303-384-9915

Mechanical & Plumbing
The Ballard Group, Inc.
2525 S Wadsworth Blvd. Ste 200
Lakewood, CO 80227
Telephone: 303-868-4514

Electrical
Cator Ruma & Associates, Co.
896 Tabor
Lakewood, CO 80401
Telephone: 303-232-8200

Security/IT/AV/Acoustics
K2
5777 Central Ave. Suite #225
Boulder, CO 80301
Telephone: 303-865-5500
FAX: 303-865-5504

Project Information
Project Number: 20-015
Drawn By: M. MARINELLI
Reviewed By: B. BREINER
Approved By: J. SHOOK

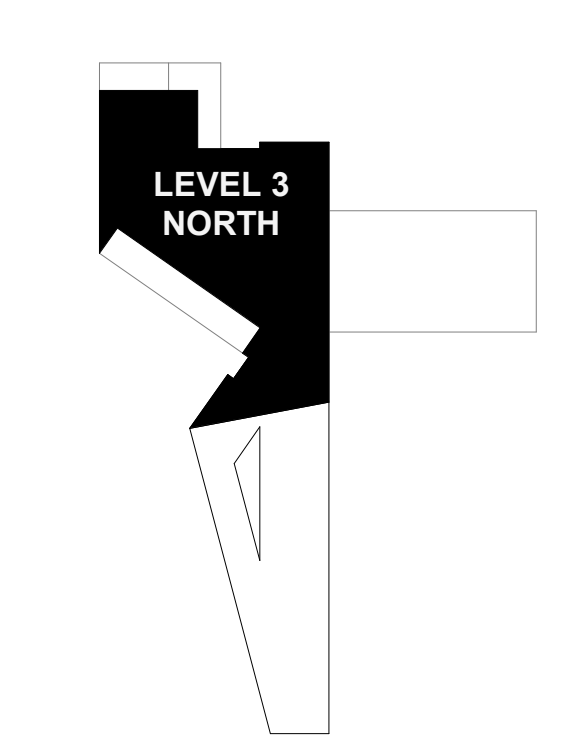

Issue	Date
SCHEMATIC DESIGN	13 NOV 2020
DESIGN DEVELOPMENT	8 MAR 2021
PROGRESS	24 MAR 2021
90% CD SET	21 MAY 2021
CONSTRUCTION DOCUMENTS	4 JUNE 2021
PR 003	28 OCT 2021
FURNITURE - ADDENDUM #1	3 NOV 2021

Project Number: 20-015
Drawn By: M. MARINELLI
Reviewed By: B. BREINER
Approved By: J. SHOOK

FURNITURE PLAN - LEVEL 3


A-163 N

FURNITURE PLAN LEGEND

- FURNITURE
- FURNITURE, SEPARATE PACKAGE
- EXISTING FURNITURE TO BE REUSED
- AREA OF BUILDING NOT IN SCOPE
- INDICATES FURNITURE LIST ITEM FOR THIS DRAWING ONLY. FURNITURE BY FURNITURE CONTRACTOR.
- FLOOR BOX LOCATION
- POWER/DATA STUB LOCATION



10/22/2021 10:56:41 AM

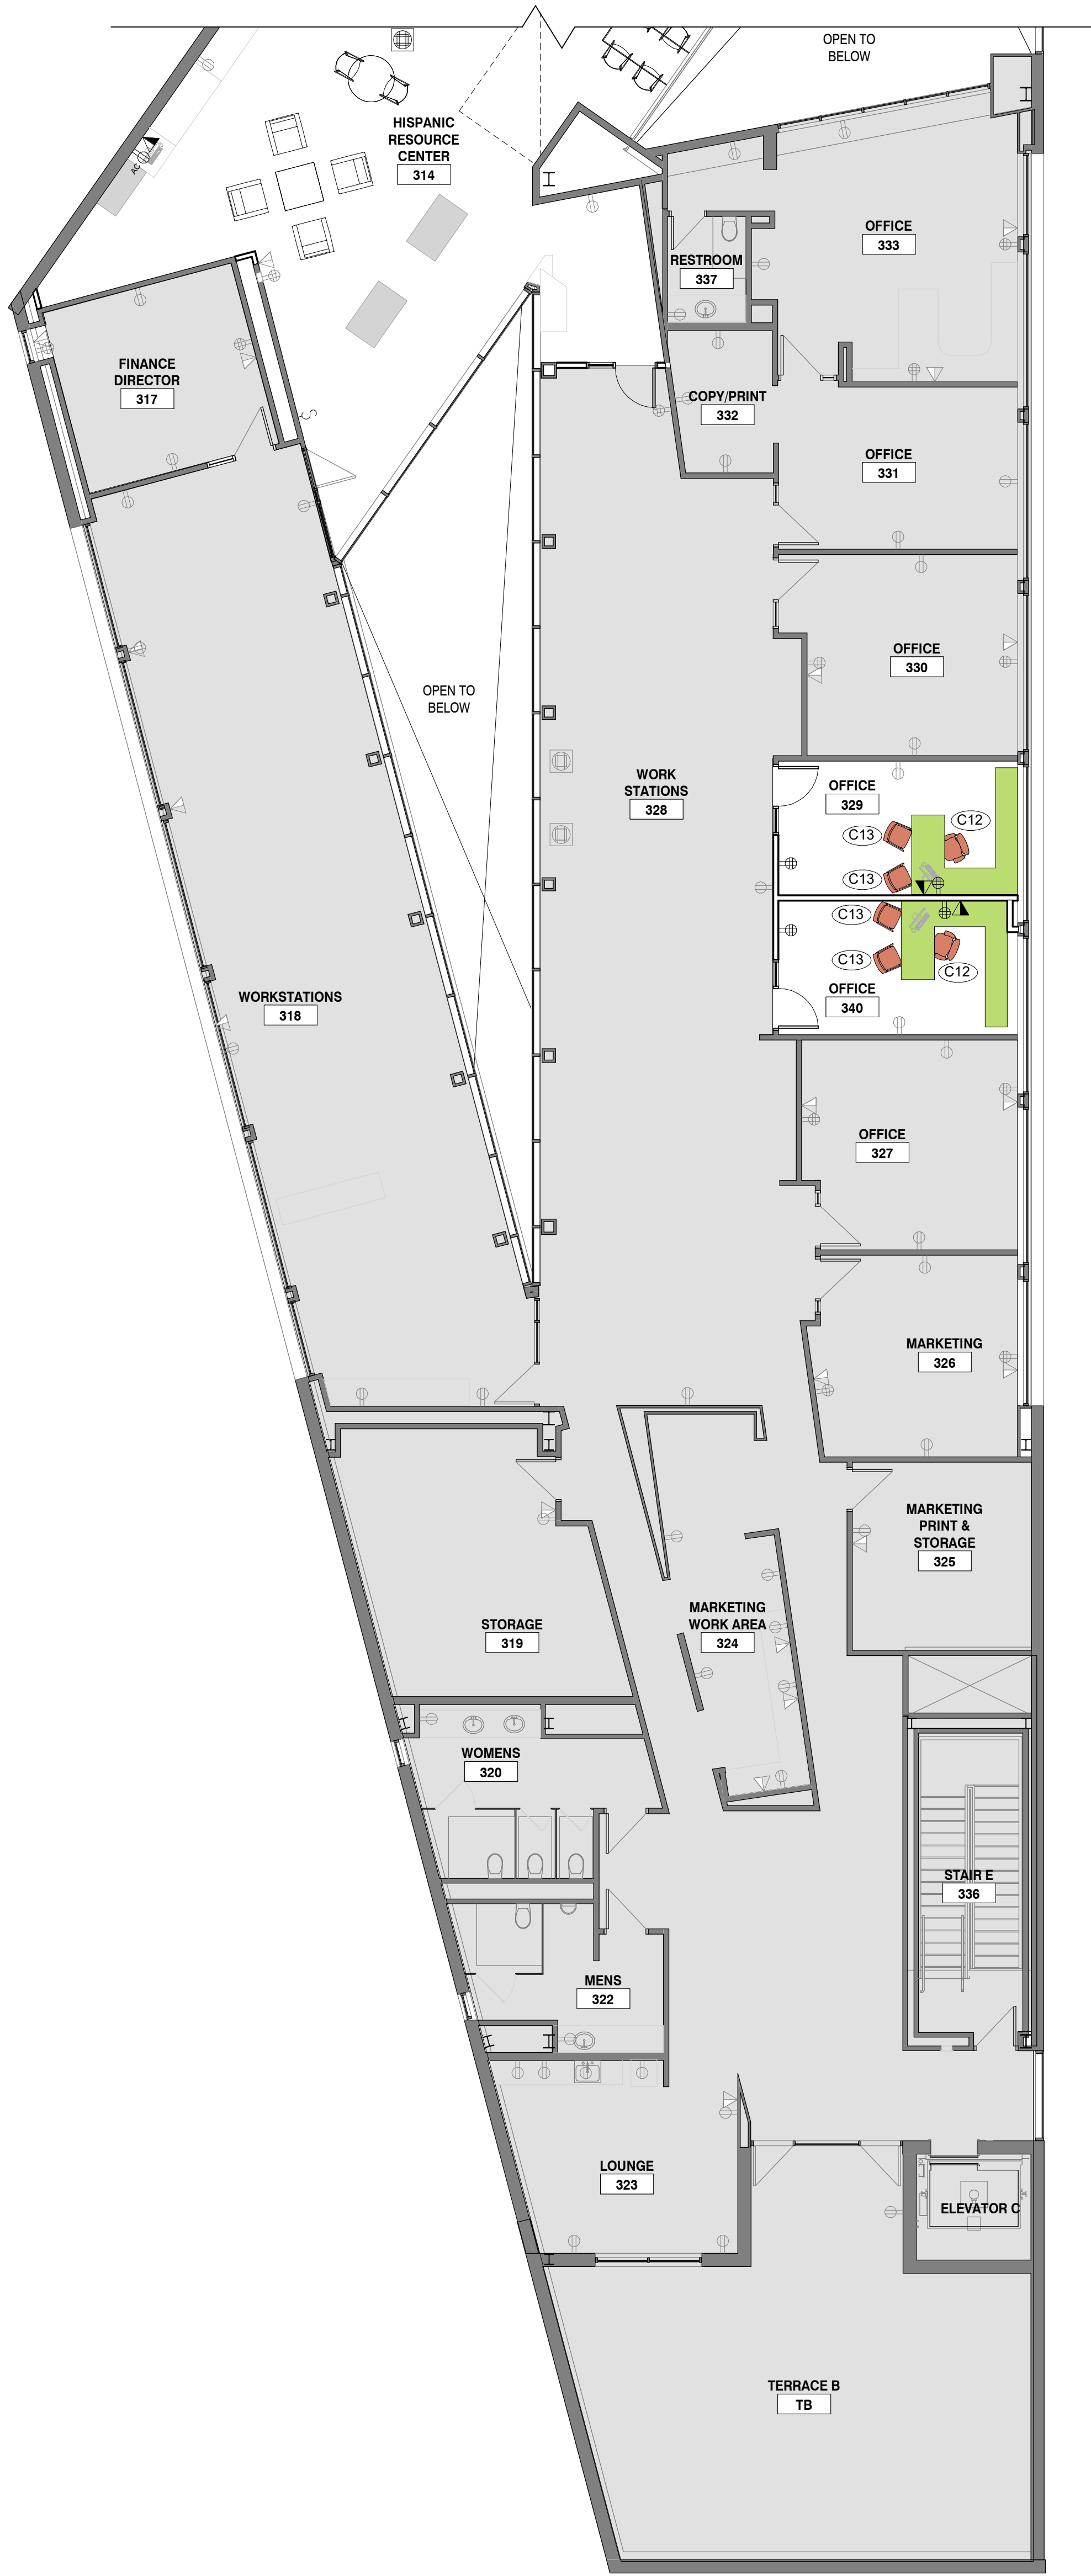

FURNITURE PLAN LEGEND	
	FURNITURE
	FURNITURE, SEPARATE PACKAGE
	EXISTING FURNITURE TO BE REUSED
	AREA OF BUILDING NOT IN SCOPE
	INDICATES FURNITURE LIST ITEM FOR THIS DRAWING ONLY. FURNITURE BY FURNITURE CONTRACTOR.
	FLOOR BOX LOCATION
	POWER/DATA STUB LOCATION

INSTALLATION 'B'

FOR REFERENCE ONLY

Rawlings Library
Renovation

100 E. Abriendo Avenue, Pueblo,
CO 81004
20-015

Pueblo City-County Library District
Attn: Jon Walker, Executive Director
100 E. Abriendo Avenue
Pueblo, CO 81004
Telephone: 719-562-5633
FAX: n/a
E-mail: jon.walker@pueblolibrary.org

Architect
AndersonMasonDale Architects, P.C.
3198 Speer Boulevard
Denver, CO 80211
Telephone: 303-294-9448
FAX: 303-294-0762
E-mail (optional)

Interior Design
HBM Architects
1382 W 9th St. Ste. 300
Cleveland, OH 44113
Telephone: 216-241-1100

Civil
S.A. Miro
4582 S. Ulster Street, Ste. 750
Denver, CO 80227
Telephone: 303-741-3737


Landscape
Werk Associates Inc.
1130 31st St. #101
Denver, CO 80205
Telephone: 303-428-0003
FAX: 303-428-0004

Structural
KLSA, Inc.
1717 Washington Ave.
Golden, CO 80401
Telephone: 303-384-0910
FAX: 303-384-9915

Mechanical & Plumbing
The Ballard Group, Inc.
2525 S Wadsworth Blvd. Ste 200
Lakewood, CO 80227
Telephone: 303-868-4514

Electrical
Cator Ruma & Associates, Co.
896 Tabor
Lakewood, CO 80401
Telephone: 303-232-6200

Security/IT/AV/Acoustics
K2
5777 Central Ave. Suite #225
Boulder, CO 80301
Telephone: 303-865-5500
FAX: 303-865-5504

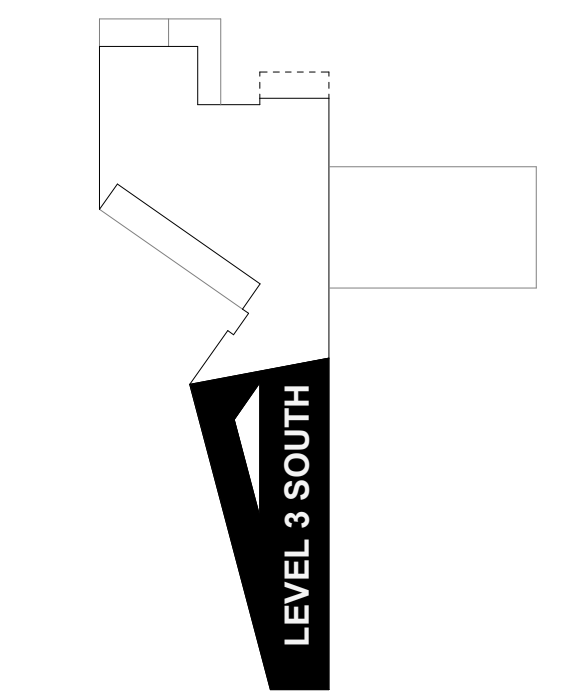

Issue	Date
SCHEMATIC DESIGN	13 NOV 2020
DESIGN DEVELOPMENT	8 MAR 2021
PROGRESS	24 MAR 2021
90% CD SET	21 MAY 2021
CONSTRUCTION DOCUMENTS	4 JUNE 2021

Project Number:	20-015
Drawn By:	M. MARINELLI
Reviewed By:	B. BREINER
Approved By:	J. SHOOK




FURNITURE PLAN - LEVEL 3

A-163 S


10/22/2021 10:56:53 AM

FURNITURE PLAN LEGEND

- FURNITURE
- FURNITURE, SEPARATE PACKAGE
- EXISTING FURNITURE TO BE REUSED
- AREA OF BUILDING NOT IN SCOPE
- INDICATES FURNITURE LIST ITEM FOR THIS DRAWING ONLY. FURNITURE BY FURNITURE CONTRACTOR.
- FLOOR BOX LOCATION
- POWER/DATA STUB LOCATION

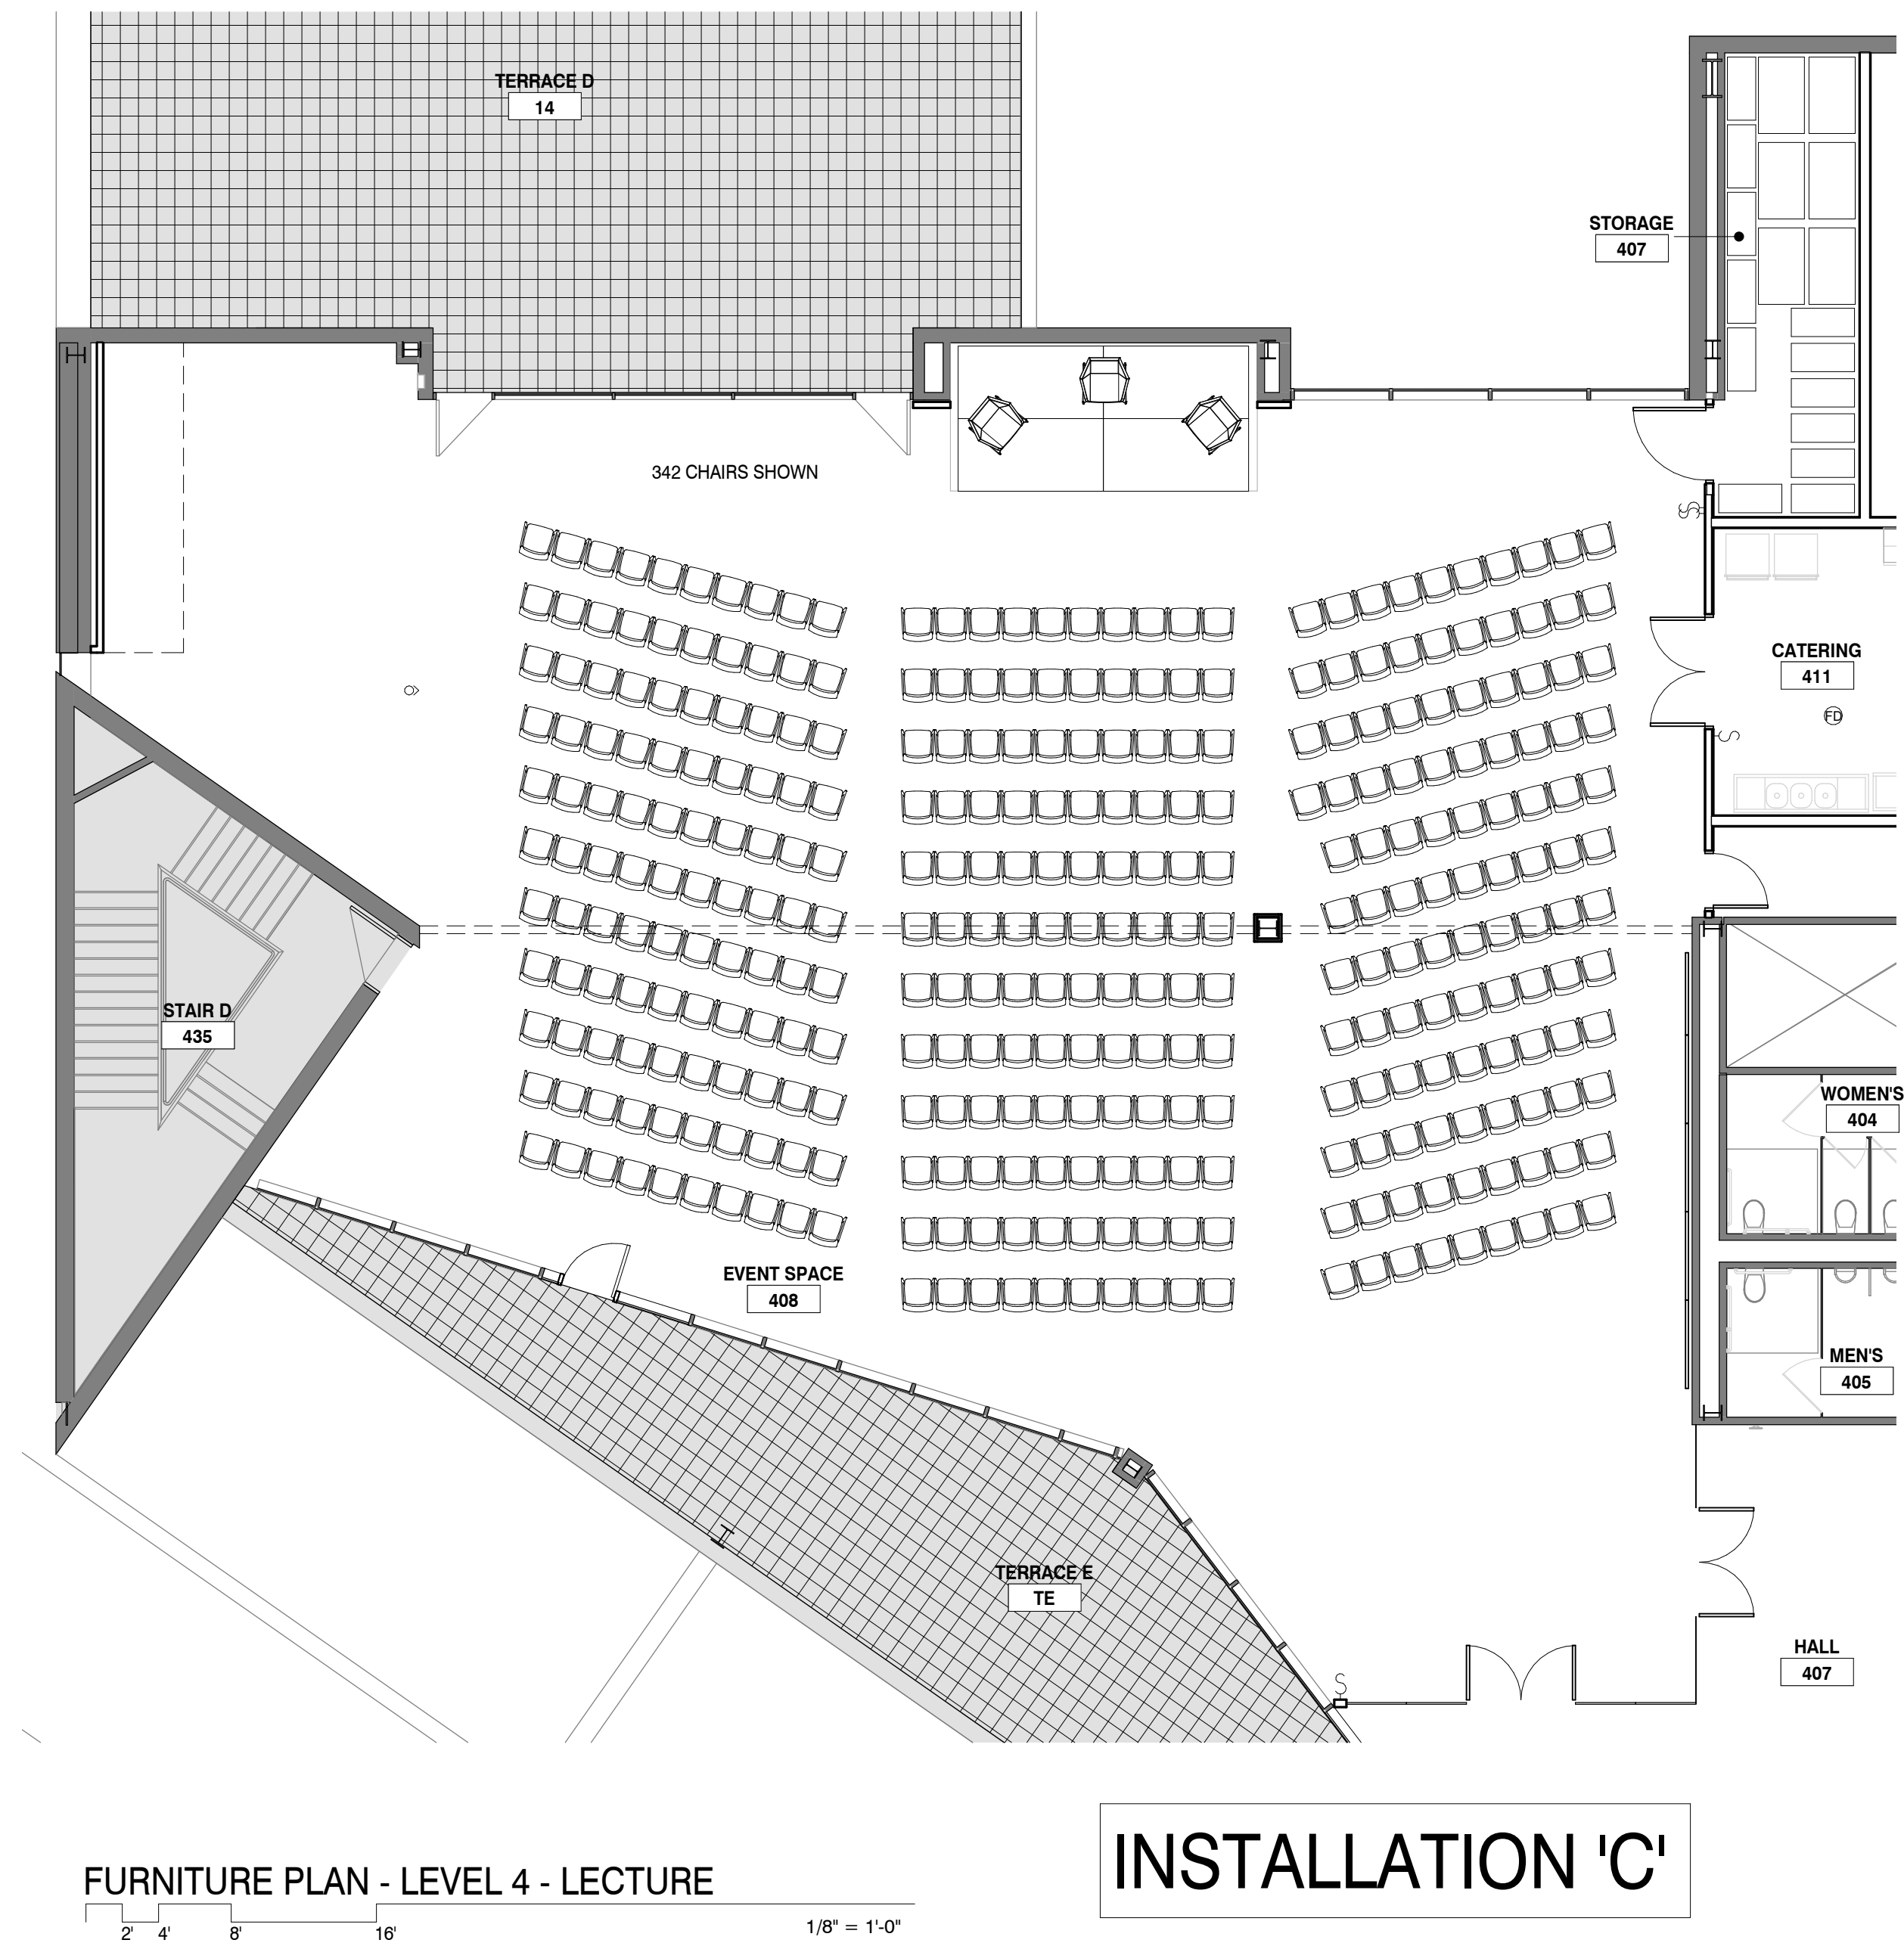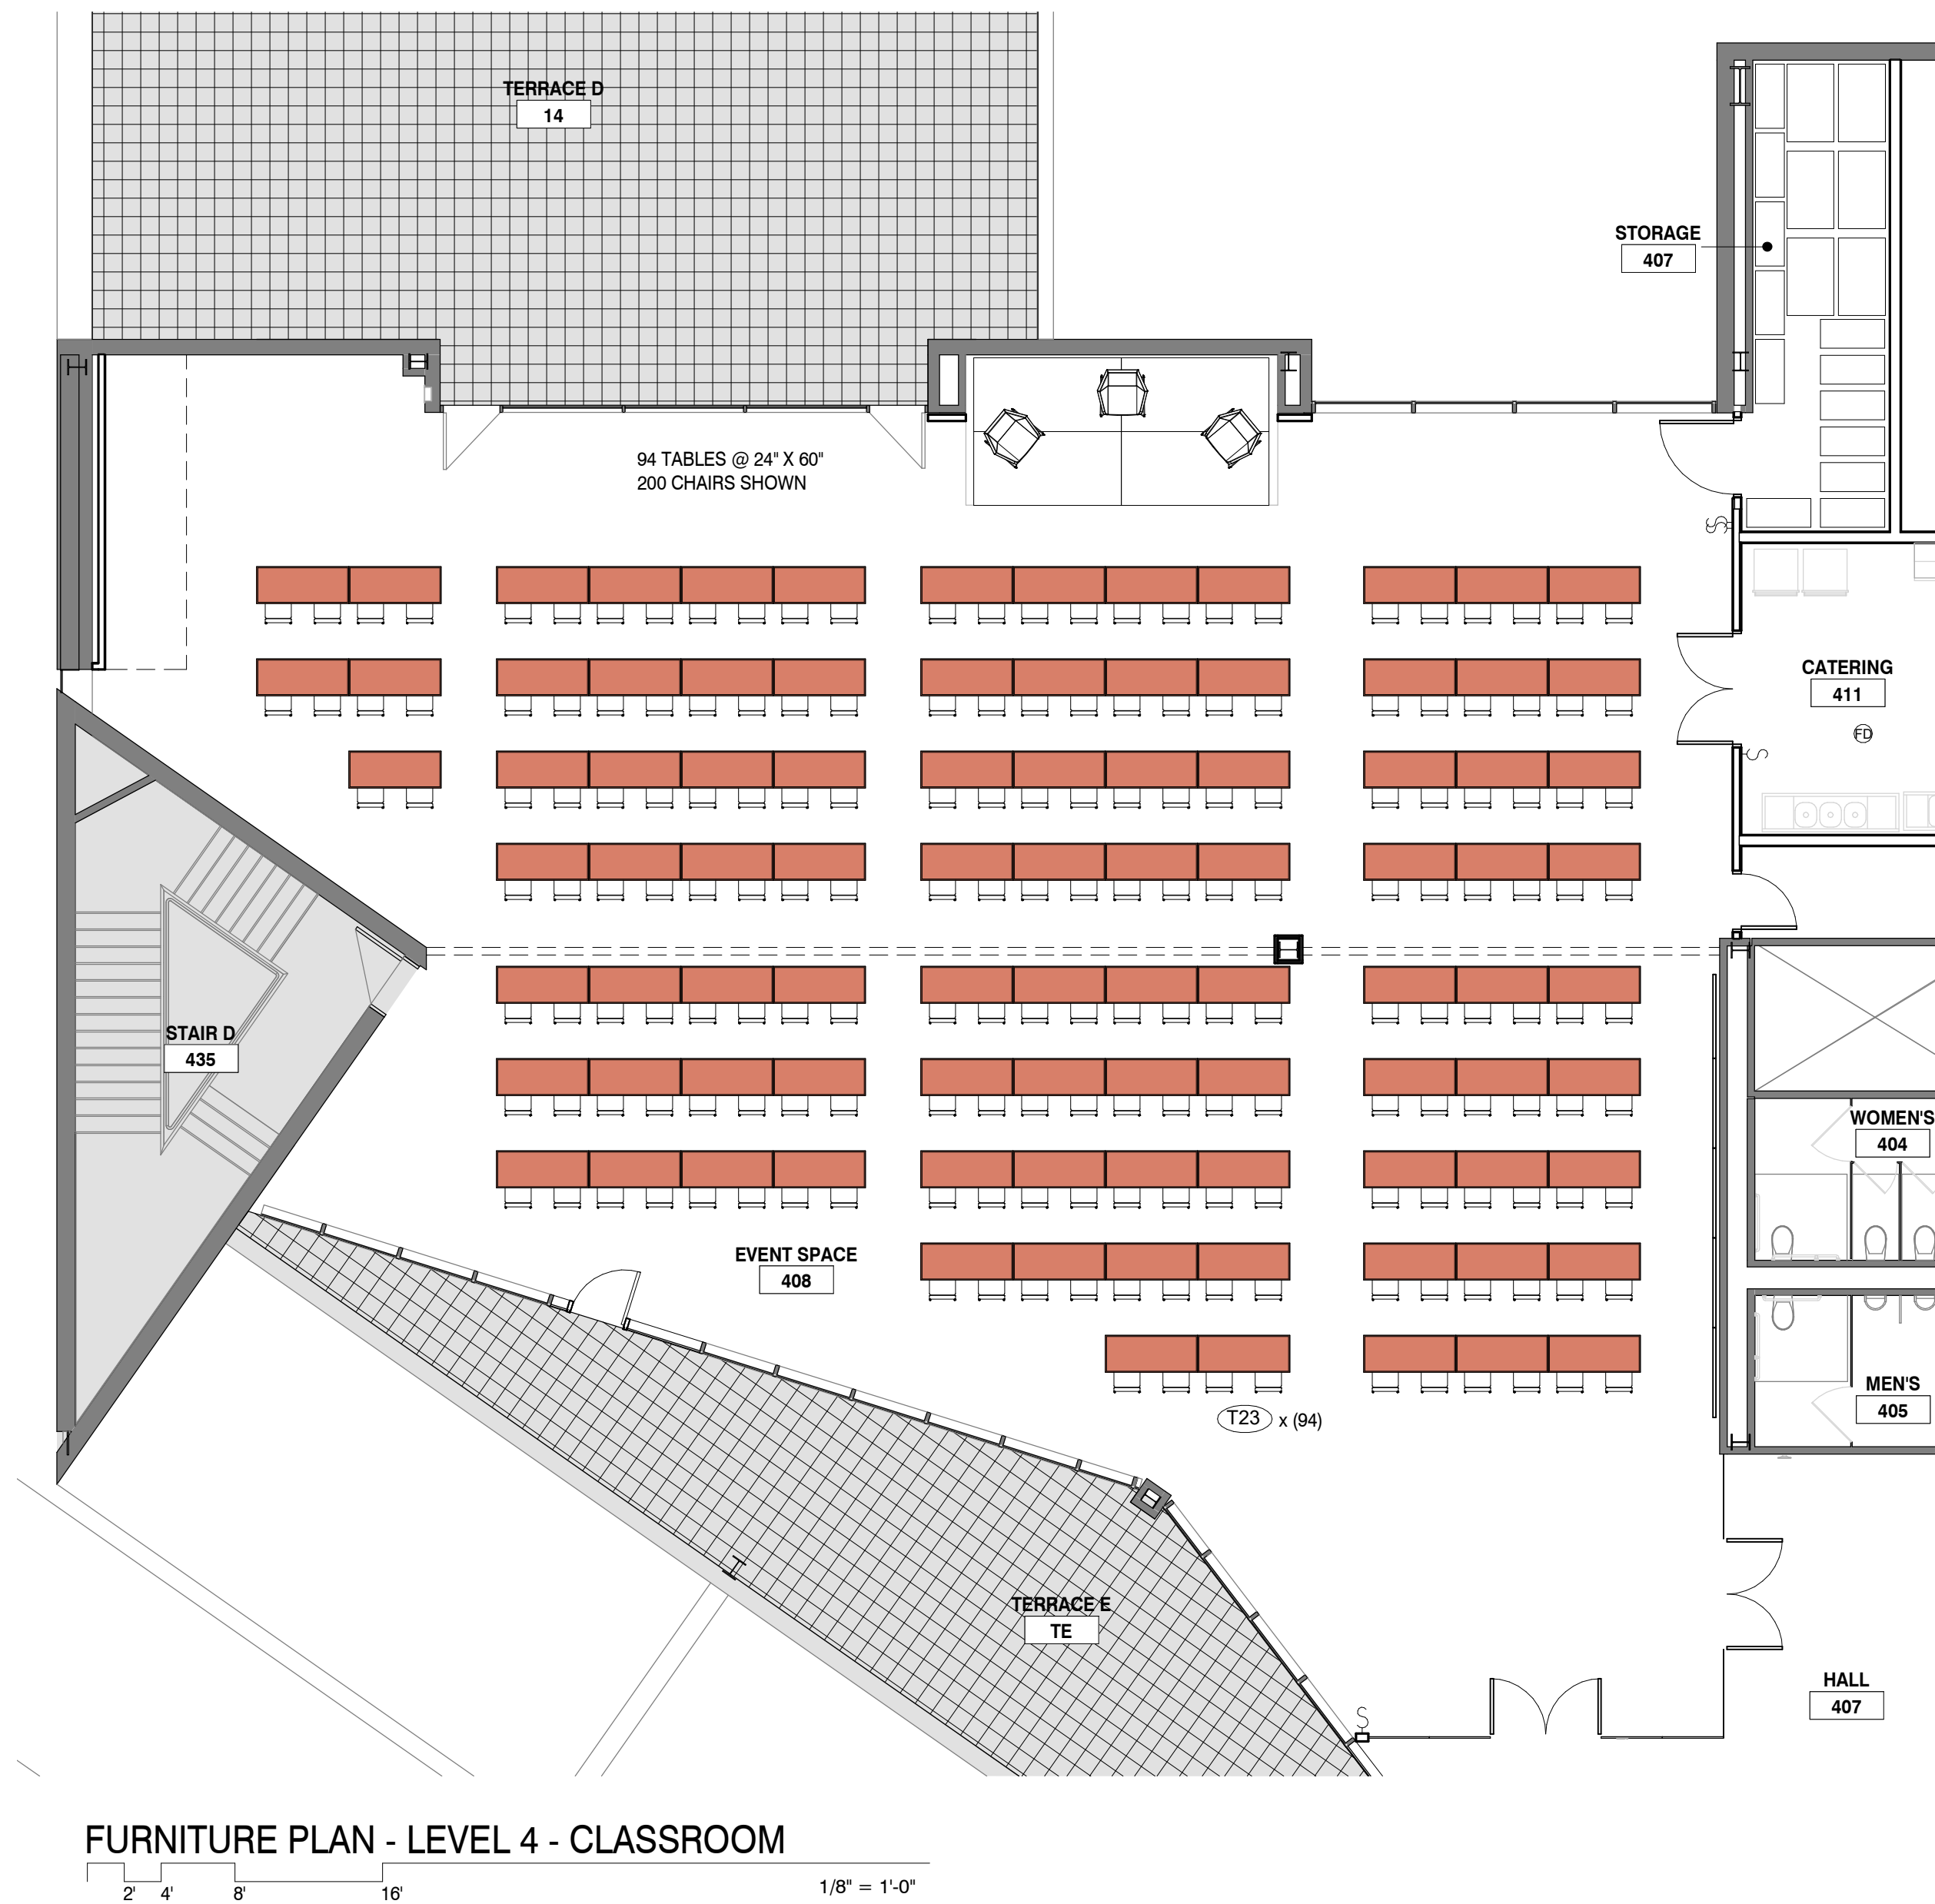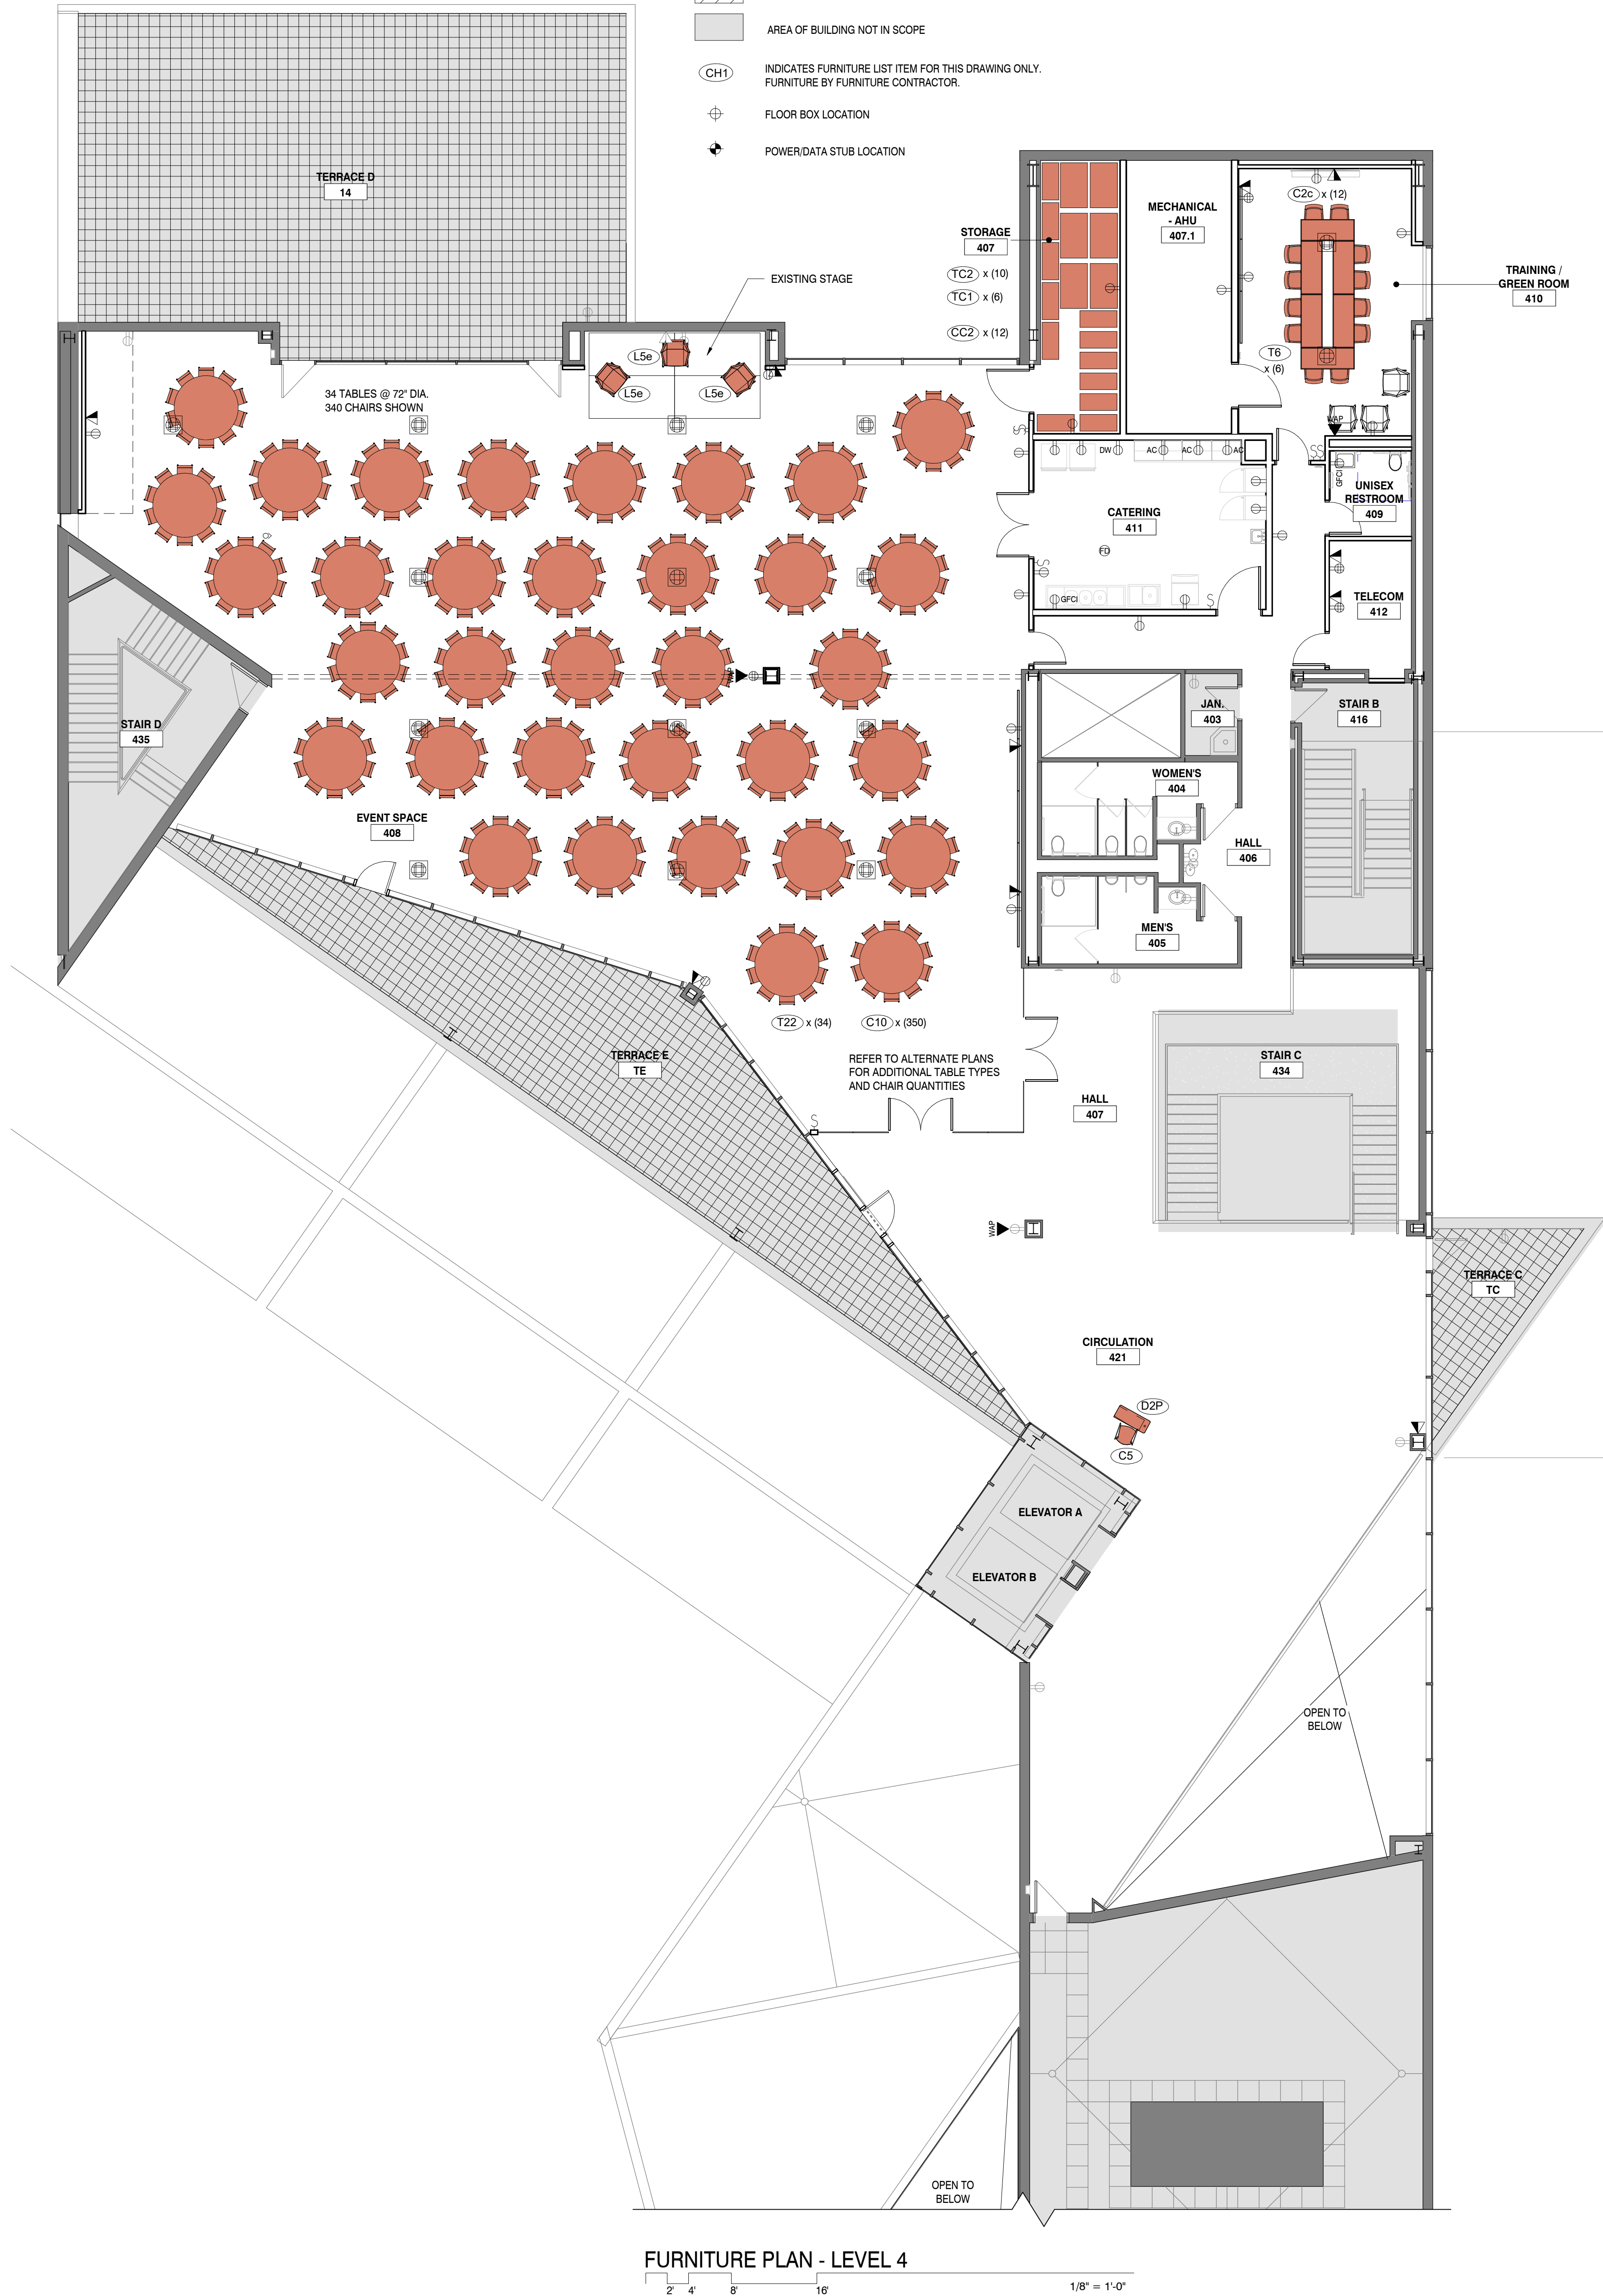

INSTALLATION 'C'



Rawlings Library Renovation

100 E. Abriendo Avenue, Pueblo, CO 81004 20-015

Pueblo City-County Library District

Attn: Jon Walker, Executive Director
100 E. Abriendo Avenue
Pueblo, CO 81004
Telephone: 719-562-5633
FAX: n/a
E-mail: jon.walker@pueblolibrary.org

Architect

AndersonMasonDale Architects, P.C.
3198 Speer Boulevard
Denver, CO 80211
Telephone: 303-294-9448
FAX: 303-294-0762
E-mail (optional)

Interior Design

HBM Architects
1382 W 9th St. Ste. 300
Cleveland, OH 44113
Telephone: 216-241-1100

Civil

S.A. Miro
4582 S. Ulster Street, Ste. 750
Denver, CO 80227
Telephone: 303-741-3737

Landscape

Wenk Associates Inc.
1130 31st St. #101
Denver, CO 80205
Telephone: 303-429-0003
FAX: 303-428-0004

Structural

KL&A, Inc.
1717 Washington Ave.
Golden, CO 80401
Telephone: 303-384-0910
FAX: 303-384-9915

Mechanical & Plumbing

The Ballard Group, Inc.
2525 S Wadsworth Blvd. Ste 200
Lakewood, CO 80227
Telephone: 303-868-4514

Electrical

Cator Ruma & Associates, Co.
896 Tabor
Lakewood, CO 80401
Telephone: 303-232-8200

Security/IT/AV/Acoustics

K2
5777 Central Ave. Suite #225
Boulder, CO 80301
Telephone: 303-865-5500
FAX: 303-865-5504

LEVEL 4

Issue	Date
SCHEMATIC DESIGN	13 NOV 2020
DESIGN DEVELOPMENT	8 MAR 2021
PROGRESS	24 MAR 2021
90% CD SET	21 MAY 2021
CONSTRUCTION DOCUMENTS	4 JUNE 2021

Project Number:	20-015
Drawn By:	M. MARINELLI
Reviewed By:	B. BREINER
Approved By:	J. SHOOK

FURNITURE PLAN - LEVEL 4

A-164 N

FOR REFERENCE ONLY

PUEBLO CITY-COUNTY LIBRARY DISTRICT

Rawlings Library - Pueblo, CO

Furniture Package Proposal Tabulation

Bid Date: 11/26/2021

Dealer	Contract Furnishings Daniel Kraig 720-956-1515 kraigd@contractdenver.com	Contract Furnishings Install Factor (Labor / Subtotal) 14.12668%	OfficeScapes Peter Husak Victor Correa 719-574-1113 phusak@officescapes.com	Pear Workplace Solutions Trevor Hile 303-824-2000 thile@pearwork.com	Projex Inc. Meghan Buford 303-949-0309 mbuford@projex-inc.com	Projex Install Factor (Labor / Subtotal) 16.36064%	Total Office Ted Del Duca 719-251-4998 tedd@total-office.com	Workspace Innovations Trevor Gehrke 970.568.5210 x 201 trevor@workspaceinnovatio ns.com	Lowest Proposal Combination
Rec'd Addendum 1, 2, 3 (Y/N)	Y	Y	Y	Y	Y	Y	Y	Y	
				Enwork Total Price to have Storage Fee Applied					
Item 1 - 3Branch	\$61,483.22	\$70,168.76	No Bid	No Bid	\$79,724.96	\$92,768.47	No Bid	No Bid	\$70,168.76
Item 2 - Arcadia	\$51,920.68	\$59,255.35	\$60,441.84	\$60,433.79	\$62,956.62	\$73,256.73	No Bid	\$63,368.01	\$59,255.35
Item 3 - Clarus	\$7,739.90	\$8,833.29	No Bid	No Bid	\$11,866.76	\$13,808.24	No Bid	\$13,656.65	\$8,833.29
Item 4 - ECA	\$1,571.58	\$1,793.59	No Bid	No Bid	\$2,001.28	\$2,328.70	No Bid	\$896.20	\$896.20
Item 5 - Enwork	\$74,565.76	\$85,099.43	\$96,100.40	\$86,825.46	\$89,578.08	\$104,233.63	No Bid	\$86,594.19	\$85,099.43
Item 5 - HON Substitution for Enwork								\$10,517.94	
Item 6 - Global Industries	No Bid	No Bid	No Bid	No Bid	\$1,812.04	\$2,108.50	No Bid	No Bid	\$2,108.50
Item 7 - Gressco by HABA	No Bid	No Bid	No Bid	No Bid	\$5,878.06	\$6,839.75	No Bid	No Bid	\$6,839.75
Item 8 - JSI	\$23,483.49	\$26,800.93	No Bid	No Bid	No Bid	No Bid	No Bid	\$54,009.16	\$26,800.93
Item 9 - KI	\$50,391.76	\$57,510.44	\$65,375.98	No Bid	\$47,752.08	\$55,564.63	No Bid	No Bid	\$55,564.63
Item 9 - HON Substitution for KI (T7P only)								\$22,417.50	
Item 10 - Kimball	No Bid	No Bid	\$27,900.08	No Bid	No Bid	No Bid	\$40,028.80	No Bid	\$27,900.08
Item 10 - SitOnIt Seating Substitution for Kimball					\$27,666.24	\$32,192.61			
Item 10 - Encore Substitution for Kimball								\$29,586.20	
Item 11 - Leland International	\$23,179.00	\$26,453.42	No Bid	No Bid	\$32,260.10	\$37,538.06	No Bid	No Bid	\$26,453.42
Item 12 - National Office	No Bid	No Bid	\$25,081.37	No Bid	No Bid	No Bid	\$29,769.22	No Bid	\$25,081.37
Item 12 - OFS Substitution for National Office					\$16,603.86	\$19,320.36			
Item 13 - Mediatechnologies	\$21,373.62	\$24,393.00	No Bid	No Bid	\$28,280.07	\$32,906.87	No Bid	No Bid	\$24,393.00
Item 14 - Mitylite	\$61,732.04	\$70,452.73	\$103,493.14	No Bid	\$89,298.34	\$103,908.12	No Bid	No Bid	\$70,452.73
Item 15 - Peter Pepper Products	\$1,165.37	\$1,330.00	No Bid	No Bid	\$2,158.92	\$2,512.13	No Bid	\$1,475.32	\$1,330.00
Item 16 - Safco	\$6,427.53	\$7,335.53	No Bid	No Bid	\$7,721.60	\$8,984.90	No Bid	No Bid	\$7,335.53
Item 17 - Science Kinetics	\$17,330.75	\$19,779.01	No Bid	No Bid	\$10,626.35	\$12,364.89	No Bid	No Bid	\$12,364.89

[illegible]